

# AVTECH ELECTROSYSTEMS LTD.

NANOSECOND WAVEFORM ELECTRONICS SINCE 1975

P.O. BOX 265 OGDENSBURG, NY U.S.A. 13669-0265 TEL: (315) 472-5270 FAX: (613) 226-2802

TEL: 1-800-265-6681 FAX: 1-800-561-1970 U.S.A. & CANADA BOX 5120 STN. F OTTAWA, ONTARIO CANADA K2C 3H4 TEL: (613) 226-5772 FAX: (613) 226-2802


# INSTRUCTIONS

MODEL AVR-E2-W-C PULSE GENERATOR

S.N.:

## WARRANTY

warrants products of its Avtech Electrosystems Ltd. free from defects in material manufacture to be workmanship under conditions of normal use. If, within year after delivery to the original owner, and after prepaid return by the original owner, this Avtech product is found to be defective, Avtech shall at its option repair or replace said defective item. This warranty does not apply to units subjected to which have been dissembled, modified or applicable specifications or conditions exceeding the ratings. This warranty is the extent of the obligation or liability assumed by Avtech with respect to this product and no other warranty or guarantee is either expressed or implied.

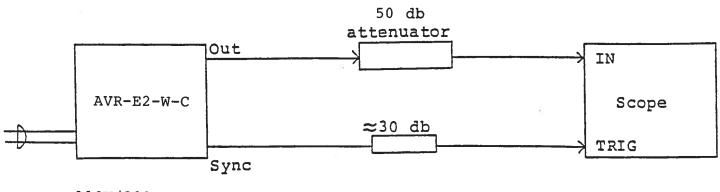

110V/220V 50-60 Hz


#### Notes:

- The bandwidth capability of components and instruments used to display the pulse generator output signal (attenuators, cables, connectors, etc.) should exceed 2 GHz.
- The use of 50 db attenuator at the scope vertical input channel will insure a peak input signal to the scope of less than one volt (necessary only if sampling scope used). If a high impedance real time scope is used, the pulse generator should be terminated using a shunt 50 ohm resistor.
- 3) The TRIG output channel provides TTL level signals. To avoid overdriving the TRIG input channel of some scopes, a 30 db attenuator should be placed at the input to the scope trigger channel. The TRIG output precedes the main output when the front panel ADVANCE-DELAY switch is in the ADVANCE position. The TRIG output lags the main output when the switch is in the DELAY position.
- 4) To obtain a stable output display the PW and PRF controls on the front panel should be set mid range. The front panel TRIG toggle switch should be in the INT position. The DELAY controls and the scope triggering controls are then adjusted to obtain a stable output. The scope may then be used to set the desired PRF by rotating the PRF controls.
- 5) The output pulse width is controlled by means of the front panel one turn PW control. To voltage control the pulse width, set the rear panel switch in the EXT position and apply 0 to +10 volts between terminal A and ground  $(R_{IN} > 10K)$ . (option).
- 6) The output pulse amplitude is controlled by means of the front panel one turn AMP control. To voltage control the output, set the rear panel switch in the EXT position and apply 0 to +10 volts between terminal A and ground (R<sub>IN</sub> > 10K). (option).
- 7) An external clock may be used to control the output PRF of the AVR unit by setting the front panel TRIG toggle switch in the EXT position and applying a 0.2 usec (approx.) TTL level pulse to the TRIG BNC connector input. For operation in this mode, the scope time base must also be triggered by the external clock rather than from the SYNC output.
- 8) AVR units with a serial number higher than 5600 are protected by an automatic overload protective circuit which controls the front panel overload light. If the unit is overloaded (by operating at an exceedingly high

duty cycle or by operating into a short circuit), the protective circuit will turn the output of the instrument OFF and turn the indicator light ON. The light will stay ON (i.e. output OFF) for about 5 seconds after which the instrument will attempt to turn ON (i.e. light OFF) for about 1 second. If the overload condition persists, the instrument will turn OFF again (i.e. light ON) for another 5 seconds. If the overload condition has been removed, the instrument will turn on and resume normal operation. Overload conditions may be removed by:

- Reducing PRF (i.e. switch to a lower range)
- Reducing pulse width (i.e. switch to a lower range)
- 3) Removing output load short circuit (if any)
- 7) The unit can be converted from 110 to 220V 50-60 Hz operation by adjusting the voltage selector card in the rear panel fused voltage selector-cable connector assembly.
- 10) For additional assistance:

Tel: (613) 226-5772 Fax: (613) 226-2802

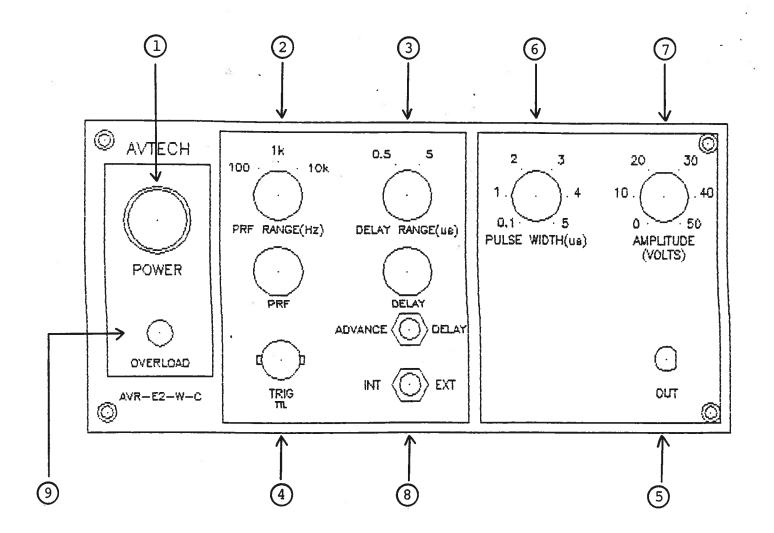

- (1) ON-OFF Switch. Applies basic prime power to all stages.
- (2) PRF Control. Varies PRF as follows:


		M)	MIN		MAX	
Range	1	10	Hz	100	Hz	
Range	2	100	Hz	1	kHz	
Range	3	1	kHz	10	kHz	

The operating PRF should be set using a scope.

- (3) <u>DELAY Control</u>. Controls the relative delay between the reference output pulse provided at the TRIG output (4) the main output (5). This delay is variable over the range of 0 to about 0.5 us (RANGE 1) and 1.0 to 5.0 us (RANGE 2). The TRIG output precedes the main output when the ADVANCE-DELAY switch is in the ADVANCE position and lags when the switch is in the DELAY position.
- (4) TRIG Output. This output is used to trigger the scope time base. The output is a TTL level 100 ns (approx.) pulse capable of driving a fifty ohm load.
- (5) <u>OUT Connector</u>. SMA connector provides output to a fifty ohm load.
- (6) <u>PW Control</u>. A one turn control which varies the output pulse width from 100 nsec to 5 us.
- (7) <u>AMP Control</u>. A one turn control which varies the output pulse amplitude to a fifty ohm load.
- (8) <u>EXT-INT Control</u>. With this toggle switch in the INT position, the PRF of the AVR unit is controlled via an internal clock which in turn is controlled by the PRF controls. With the toggle switch in the EXT position, the AVR unit requires a 0.2 us TTL level pulse applied at the TRIG input in order to trigger the output stages. In addition, in this mode, the scope time base must be triggered by the external trigger source.
- (9) OVERLOAD. AVR units with a serial number higher than 5600 are protected by an automatic overload protective circuit which controls the front panel overload light. If the unit is overloaded (by operating at an exceedingly high duty cycle or by operating into a short circuit), the protective circuit will turn the output of the instrument OFF and turn the indicator light ON. The light will stay ON (i.e. output OFF) for about 5 seconds after which the instrument will attempt to turn ON (i.e. light OFF) for about 1 second. If the overload condition persists, the instrument will turn OFF again (i.e. light ON) for another 5 seconds. If the overload


condition has been removed, the instrument will turn on and resume normal operation. Overload conditions may be removed by:

- Reducing PRF (i.e. switch to a lower range)
- Reducing pulse width (i.e. switch to a lower range)
- 3) Removing output load short circuit (if any)

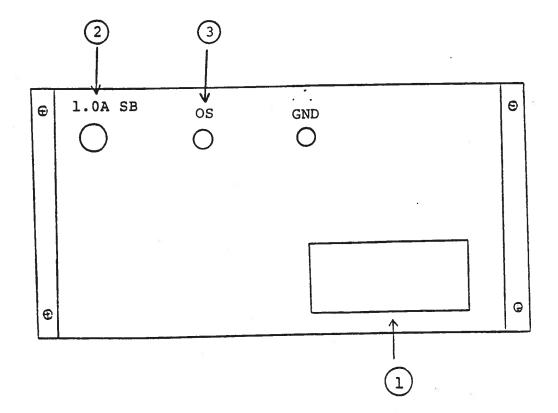

- (1) FUSED CONNECTOR, VOLTAGE SELECTOR. The detachable power cord is connected at this point. In addition, the removable cord is adjusted to select the desired input operating voltage. The unit also contains the main power fuse (0.5A SB).
- (2) <u>1.0A SB</u>. Fuse which protects the output stage if the output duty cycle rating is exceeded.
- (3) <u>DC Offset</u>. To DC offset the output pulse at the output, connect a DC power supply set to the required DC offset value to the OS terminals (V<sub>MAX</sub> ±50 volts, I<sub>MAX</sub> ±100 mA). (option).

# SYSTEM BLOCK DIAGRAM

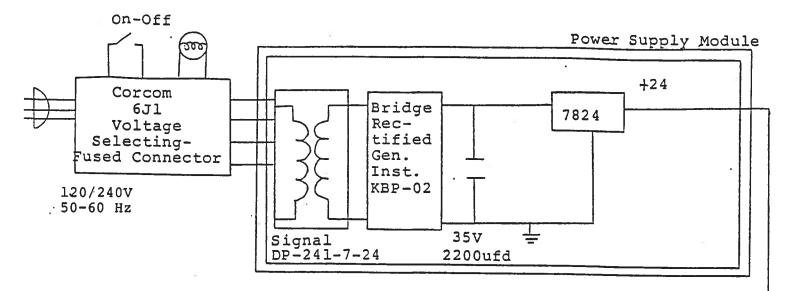

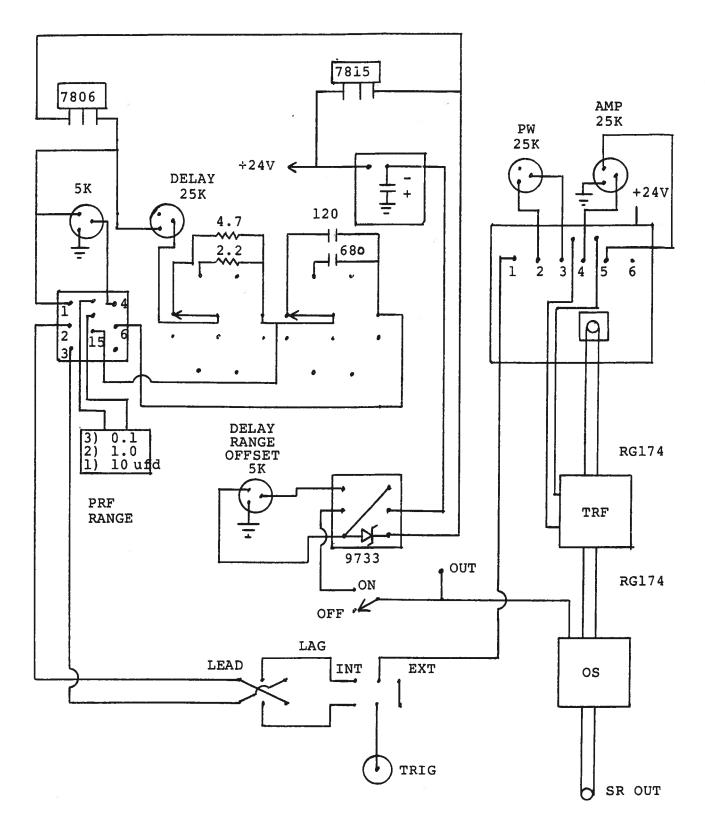


Fig. 5 AVR-E1-W-C-P-OT (GGB MOD)

### SYSTEM DESCRIPTION AND REPAIR PROCEDURE

The AVR-E2-W-C consists of the following basic modules:

- 1) AVR-E2-W-PG pulse generator module
- 2) AVR-E2-W-CL clock module
- 3) +24V power supply board
- 4) Overload module

The modules are interconnected as shown in Fig. 4.

The clock module controls the output PRF and the relative delay between the main output and the TRIG output. The PG pulse generator modules generate the output pulse. In the event of an instrument malfunction, it is most likely that the rear panel 1.0A SB fuse may have failed due to an output short circuit condition or to a high duty cycle condition. If the fuse is not blown, then the four Phillips screws on the back panel should be removed. The top cover may then be slid off and operation of the clock and power supply modules should be checked. The clock module is functioning properly if:

- a) 0.1 us TTL level outputs are observed at Pins 2 and 3.
- b) The PRF of the outputs can be varied over the range of 10 Hz to 10 kHz using the PRF controls.
- c) The relative delay between the Pin 2 and 3 outputs can be varied by at least 5 us by the DELAY controls.

The sealed clock module must be returned to Avtech for repair or replacement if the above conditions are not observed. The power supply board generates +24V DC to power the other modules. If the voltage is less than +24V, turn off the prime power and unsolder the lead from the 7824 regulator chip on the power supply board. Solder a 100 ohm 5 watt resistor to the 7824 output to ground and turn on the prime power. A voltage of +24 volts should be read. If the voltage is less then the power supply board is defective and should be repaired or replaced.

aug. 4/93 Edition B

## SENTENDED TO THE TOTAL WHILE THE PROPERTY OF THE PARTY.

-EA

the future about connected set to a resemble J-W-SE-RP syl-

-05

in forming includence housing the U.S. Ring Co.

Princip Transfer reward With

Publish from I must be

The wide of a professional and an experience of a second control of the school of the

the cost course concrete the endpose FWE end bloc relations delies between the model to dead the twitte endpose. The featuries generally model as quarerally included the cost, on the course of the endpose of the second the cost, of the cost, or particularly and the cost, of the cost, of the cost, of the cost of the cost, on the cost, of the cost, or constitute the cost, of the cost, or constitute the cost, of the cost, or constitute the cost, or cost, or constitute the cost, of the cost, or co

of the PF of the cuttouts are charted at Rins 2 and 3.

If the PF of the cuttouts can be veried over the reagn of the state of the second over the PF of the second over the PF.

. The filter we devey between the Pon 2 and 1 putpoles can be a few between the fit of the DELAY controls.

The ecotod clost modules must be reduced to halons to repetite epoch consumple to be above summations are not observed. The caper ca