

P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802


TEL: 1-800-265-6681
FAX: 1-800-561-1970

e-mail: info@avtechpulse.com
http://www.avtechpulse.com/

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET


Model: AV-106B-B-P-R5
S.N.: 11289
Date: September 2, 2005

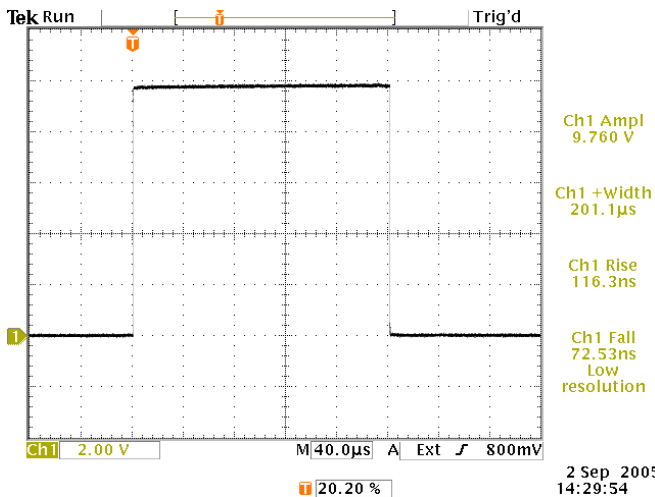

- a) Output Signal Amplitude: 0 to +100A
- b) Pulse Width: 2 us - 200 us
- c) Rise Time: ≤ 1 us
- d) Fall Time: ≤ 1 us
- e) PRF: 1 - 100 Hz

+10A into 0.98Ω, maximum pulse width and duty cycle.
2 V/div, 40 us/div.

f) Jitter, Stability: OK

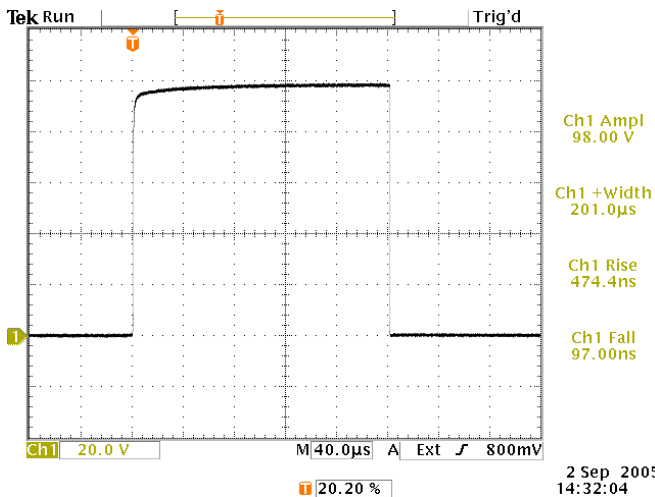

g) Prime Power: 100-240V AC, 50-60 Hz.

100A into 0.98Ω, maximum pulse width and duty cycle.
20 V/div, 40 us/div.

References levels: 20%, 80%.