

P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)


BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVX-FD2-PS
Type: Frequency Divider
S.N.: 12751
Date: December 7, 2011


Division Test

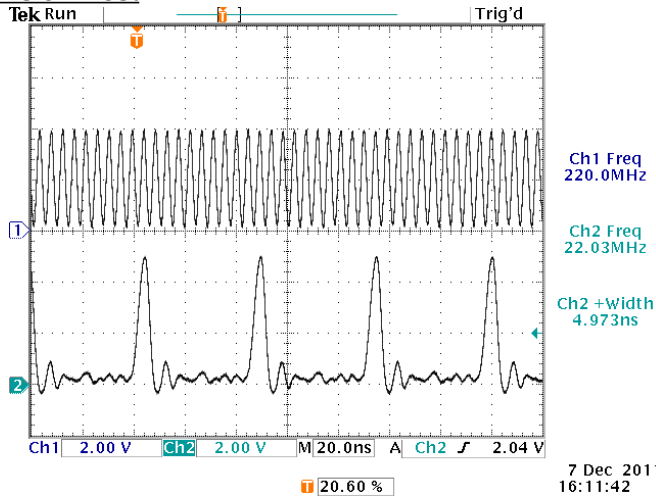

Top: TTL input, 220 MHz, 50Ω R_{IN}.
Bottom: TTL output, ÷10, 5 ns pulse width, 50Ω load.
Both: 2V/div, 20 ns/div.

- a) Output Signal Amplitude: TTL, R_L ≥ 50Ω
- b) Pulse Width: 5 ns - 5 us
- c) Division Factor: 0 to 255
- d) PRF: 250 MHz max. in, 50 MHz max. out
- e) Jitter, Stability: OK
- f) Prime Power: 100-240V AC, 50-60 Hz.

Reset Test

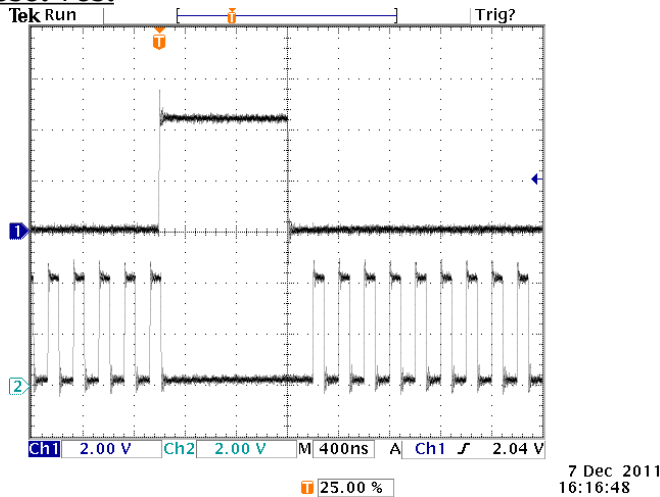

Top: RESET input.
Bottom: TTL output, ÷5, f_{IN}=25 MHz.
Both: 2V/div, 400 ns/div.