



AVTECH ELECTROSYSTEMS LTD.

NANOSECOND WAVEFORM ELECTRONICS
SINCE 1975

P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802


TEL: 1-800-265-6681
FAX: 1-800-561-1970

e-mail: info@avtechpulse.com
<http://www.avtechpulse.com/>


BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET

Model: AV-153A-B-R5
S.N.: 10969
Date: September 1, 2004

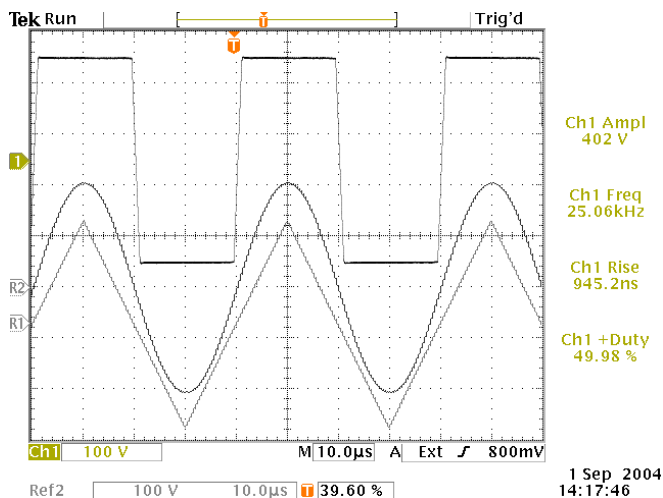

Square, Sine, and Triangle outputs into a 5kΩ load.
25 kHz. 100 V/div, 10 us/div.

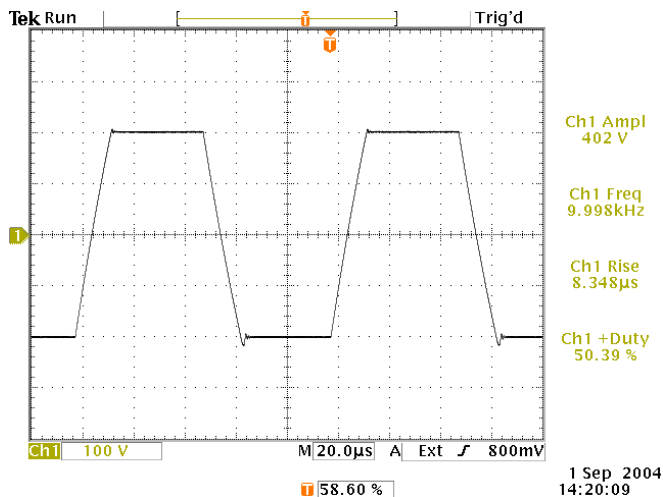

Square wave output into a load consisting of 5kΩ and 10000 pF in parallel. 10 kHz, 20 us / div, 100 V/div.

References levels: 20%, 80%.

- a) Output Signal Amplitude:
±200V, to 5 kΩ
- b) Waveforms: sine, triangle, square, pulse
- c) Rise Time: < 1 us (for a square wave into a resistive load)
- d) Fall Time: < 1 us (for a square wave into a resistive load)
- e) PRF: DC to 300 kHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.