

P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265


TEL: 888-670-8729 (USA & Canada) or +1-613-226-5772 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-226-2802 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/


PERFORMANCE CHECKSHEET

Model: AV-153AH-B
Type: High-Voltage Function Generator and Linear Amplifier
S.N.: 11500
Date: June 13, 2006

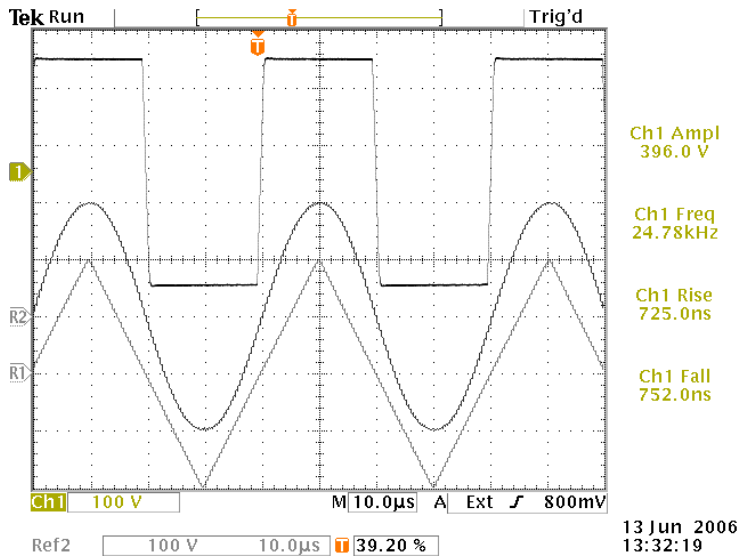

Square, Sine, and Triangle outputs into a 1.2 kΩ load at maximum amplitude. 25 kHz. 100 V/div, 10 us/div.

- a) Output Signal Amplitude: ±200V
- b) Waveforms: sine, triangle, square, pulse
- c) Rise Time: < 1 us (for a square wave into a resistive load)
- d) Fall Time: < 1 us (for a square wave into a resistive load)
- e) PRF: DC to 300 kHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.

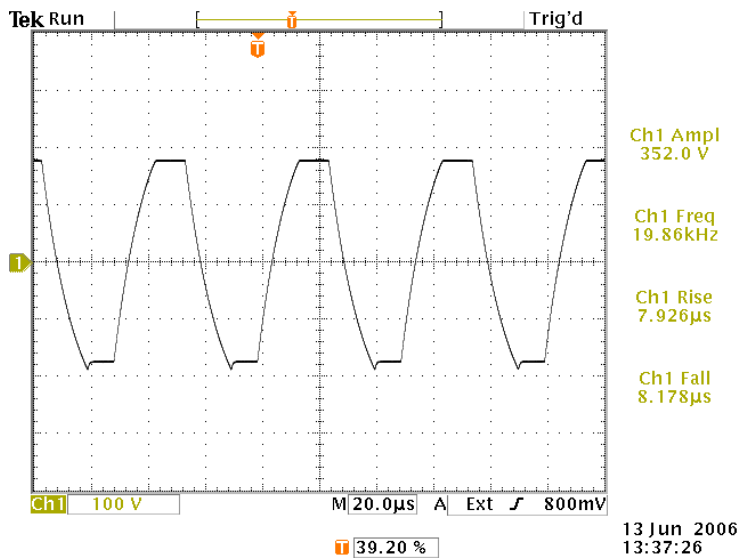

Square wave output into a load consisting of 1.2 kΩ and 10000 pF in parallel. Amplitude set to 180V. 20 kHz, 20 us / div, 100 V/div.

References levels: 20%, 80%.