



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265  
TEL: (315) 472-5270  
FAX: (613) 226-2802


TEL: 1-800-265-6681  
FAX: 1-800-561-1970

e-mail: info@avtechpulse.com  
http://www.avtechpulse.com/

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4  
TEL: (613) 226-5772  
FAX: (613) 226-2802


PERFORMANCE CHECKSHEET

Model: AV-153B-B  
S.N.: 11113  
Date: January 21, 2005

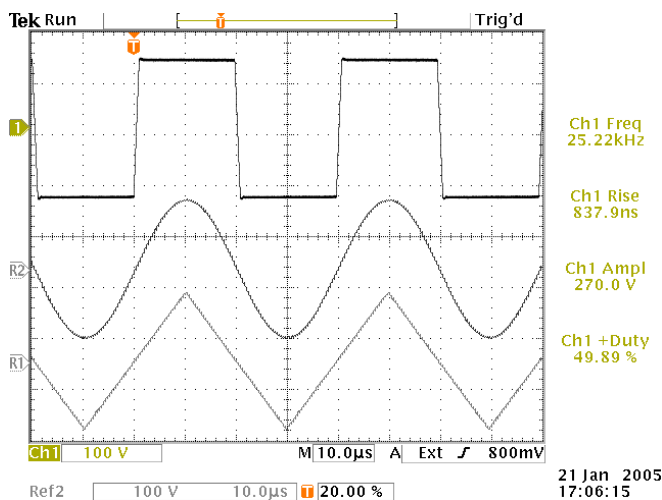

Square, Sine, and Triangle outputs into a 500 Ω load.  
25 kHz. 100 V/div, 10 us/div.

- a) Output Signal Amplitude: ±135V, to 500 Ω
- b) Waveforms: sine, triangle, square
- c) Rise Time: 1 us (for square wave)
- d) Fall Time: 1 us (for square wave)
- e) PRF: to 50 kHz

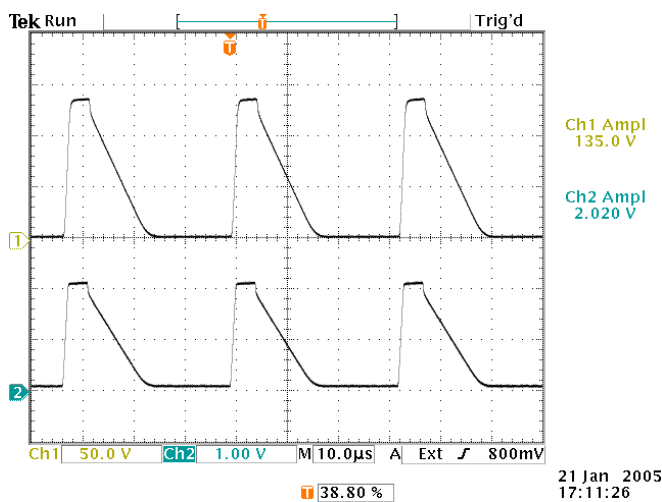

EXT mode, maximum gain.  
Top: +135V pulse out. 50V/div, 10 us/div.  
Bottom: +2V pulse in. 1V/div, 10 us/div.

- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz

References levels: 10%, 90%.