



info@avtechpulse.com
http://www.avtechpulse.com/


Tel: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
Fax: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, CANADA K2C3H5

PERFORMANCE CHECKSHEET

Model: AVO-6HF-B-PN
Type: High-Speed High-Power Laser Diode Generator
S.N.: 13946
Date: January 23, 2020


Rise & Fall Time Test

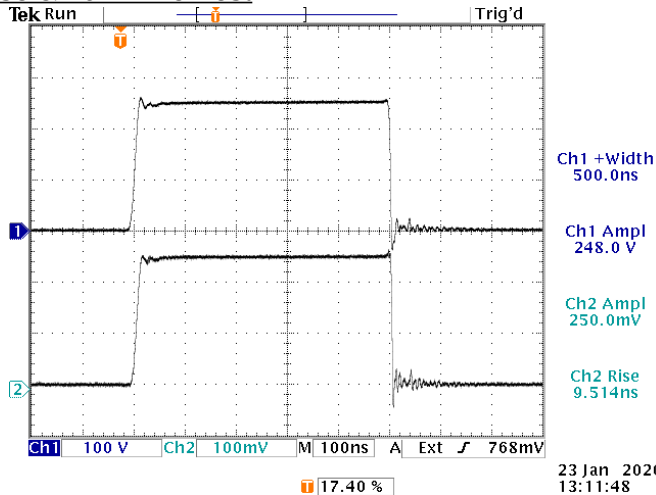

Top: +250V into the output module, 100 Hz, 100 V/div.
Bot: Resulting +5A through a Pearson 2878 current transformer on the output module, into 50Ω. 2 A/div.

- a) Output Signal Amplitude: up to ±5A
- b) Pulse Width (FWHM): 50 ns - 50 us, 4% duty cycle
- c) Rise Time (20%-80%): < 12 ns
- d) Fall Time (20%-80%): < 12 ns
- e) PRF: 1 Hz - 100 kHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.

Wide Pulse Test

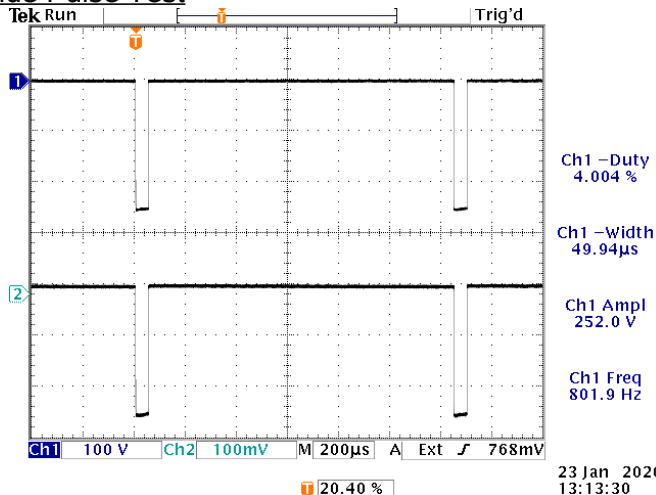

Top: -250V into the output module, 800 Hz, 100 V/div.
Bot: Resulting -5A through a Pearson 2878 current transformer on the output module, into 50Ω. 2 A/div.

References levels: 20%, 80%.