



□ P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-226-5772 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-226-2802 (Intl)

☒ BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVO-9H-B-P1B-T1B-P
Type: Ultra-High-Speed Laser Diode Driver
S.N.: 11807
Date: July 19, 2007

Output Amplitude: 0 to +103V, to 50Ω
Pulse Width (FWHM): 20 – 200 ns
Rise Time (20%-80%): ≤ 700 ps
Fall Time (80%-20%): ≤ 700 ps
PRF: 1 Hz - 50 kHz
Jitter, Stability: OK
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms

Mainframe output, +103V into 50 Ohms, 50 kHz,
20 ns pulse width:

“MI” output of AVX-S2-T1B-P1B into 50 Ohms,
for +103V, 50 kHz, 100 ns pulse width:

5 ns/div. 20 V/div (20 mV × 60 dB, = 0.4 A/div):

20 ns/div. 2 V/div (20 mV × 40 dB, ≈ 0.44 A/div):

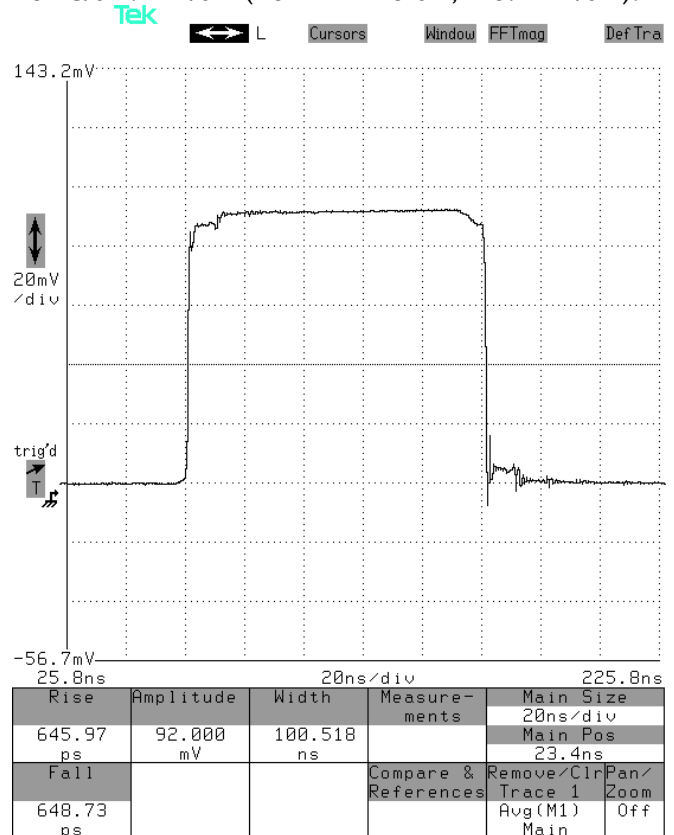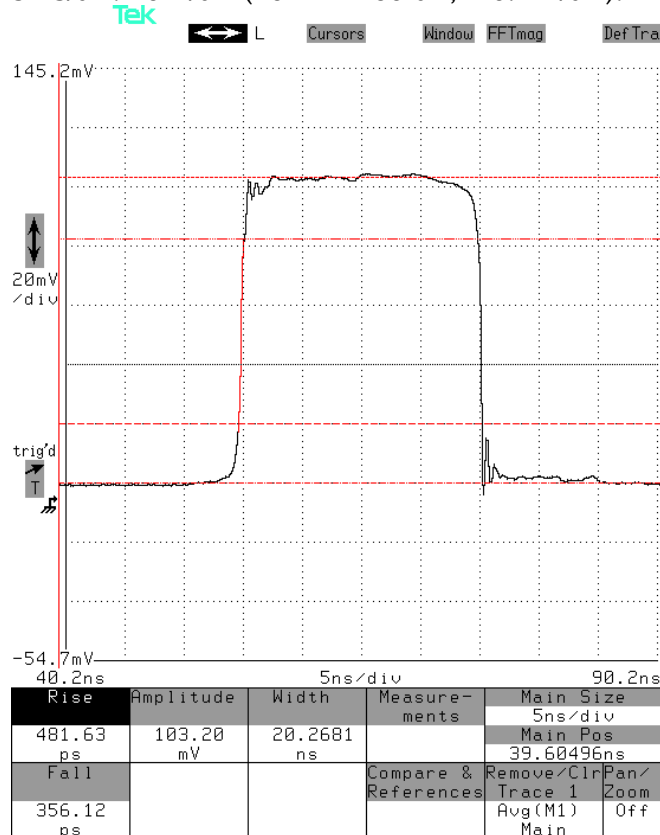

“MI” output of AVX-S1-P4-ARA into 50 Ohms, for +103V, 50 kHz, 100 ns pulse width, with 20 dB attenuator between the mainframe and the output module:

20 ns/div. 0.2 V/div (20 mV × 20 dB, ≈ 0.44 A/div):

