



□ P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-226-5772 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-226-2802 (Intl)

☒ BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVO-9H1-B-AK1-P-P2-QTKA
Type: Ultra-High-Speed Laser Diode Driver
S.N.: 12117
Date: November 28, 2008

Output Amplitude: 0 to +100V, to 50Ω
Pulse Width (FWHM): 10 – 500 ns
Rise Time (20%-80%): ≤ 1.2 ns
Fall Time (80%-20%): ≤ 2 ns (3 ns if PW<15ns)
PRF: 1 Hz - 200 kHz
Jitter, Stability: OK
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms

Mainframe output, +100V into 50 Ohms, 200 kHz,
25 ns pulse width:

Mainframe output, +100V into 50 Ohms, 40 kHz,
500 ns pulse width:

5 ns/div. 20 V/div (200 mV × 40 dB, = 0.4 A/div):

100 ns/div. 20 V/div (200 mV × 40 dB):

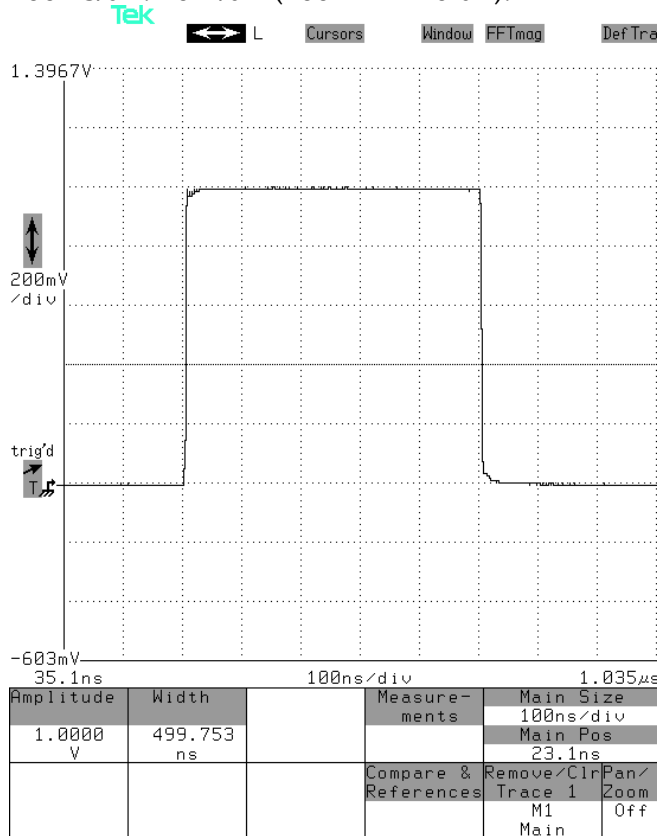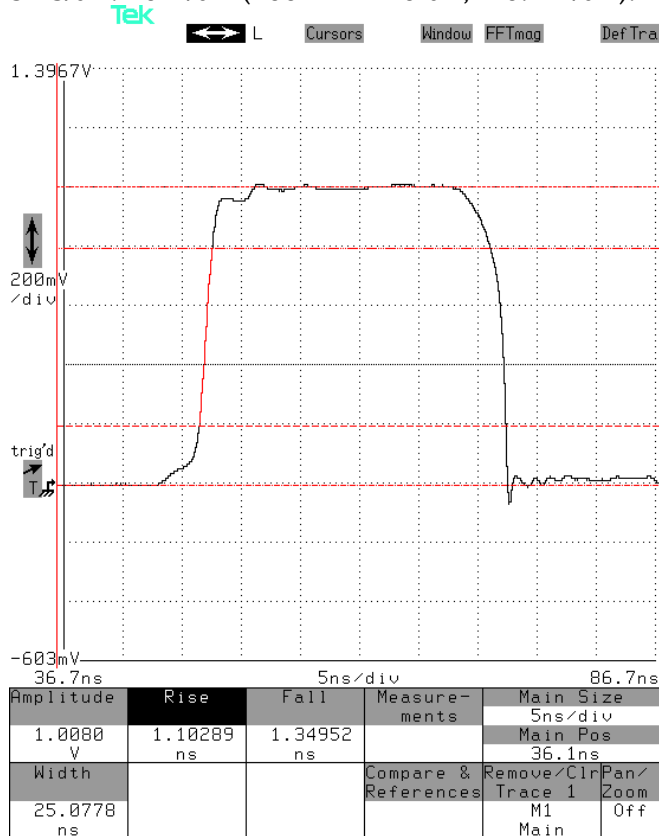

“M1” output of AVX-S1-P1B into 50 Ohms, for +100V, 10 kHz, 100 ns pulse width, with a 1N4148 test diode installed in the output sockets:

20 ns/div. 2 V/div (200 mV × 20 dB, ≈ 0.44 A/div):

