



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265


TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVOZ-A1A-B-TNT-EA-R5-P  
Type: High Speed, High Current Pulse Generator  
S.N.: 12168  
Date: April 6, 2009

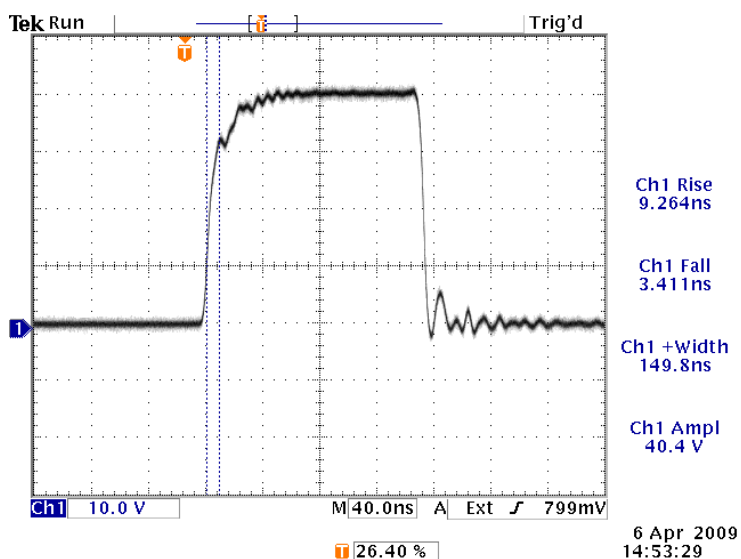

- a) Output Signal Amplitude: 0 to +40V
- b) Pulse Width (FWHM): 15 - 150 ns
- c) Rise Time (20%-80%): < 10 ns
- d) Fall Time (80%-20%): < 10 ns
- e) PRF: 1 Hz - 1 MHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.

Output into the provided 2.0 Ohm test load, using the AV-CLZ2-60 cabling.

10 kHz, 150 ns, +40V.

Reference levels: 10%, 90%.