


AVO-9A-B, 200 mA, 4 ns pulse

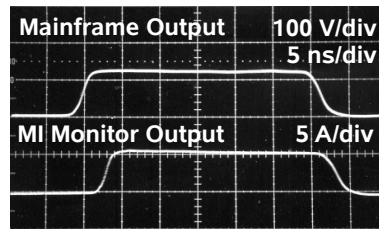

AVO-9P-B, 5A, 30 ns pulse

- ◆ IEEE-488.2 GPIB and RS-232 control (-B units)
- ◆ Peak currents from 100 mA to 14 Amps
- ◆ Pulse widths from 0.4 to 1 us, PRF to 1 MHz
- ◆ Rise times from 0.2 to 4 ns
- ◆ Simple socket mounting of laser diodes, which does not degrade rise times

The AVO-9 series offers a range of easy-to-use, ultra-high-speed pulsed laser diode drivers. Each model in the AVO-9 series consists of an instrument mainframe and an output module connected to the mainframe by a short coaxial cable. The mainframe generates a voltage pulse that is supplied to the output module. The output module has a special high-speed socket designed specifically for the user's packaged laser diode, and a series resistance. This arrangement provides a user-friendly "plug-and-play" setup, without degrading performance. Different output modules can be used if the user needs to drive more than one type of diode.

All models include a variant of the AVX-S1 output module (see www.avtechpulse.com/laser-bias/avx-s1) that provides a socket into which the user's laser diode is inserted. Avtech can customize the sockets for many packages - for example, 14-pin butterfly, 5.6 mm can, 9 mm can, TO-3, and others. (The laser diodes are *not* supplied with the AVO-9 series). The output module connects to the instrument mainframe using one or two detachable coaxial cables.

The output module contains the necessary elements to match the laser diode to the pulse generator mainframe. Output modules may be interchanged to accommodate different diode packages or different pin connections. A forward DC bias current of up to 100 mA may be applied to the laser diode by applying the desired DC current to a solder terminal on the output module. The output modules include "MV" and "MI" SMA outputs for sensing the voltage and current of the laser diode. (Due to the parasitic inductance in the sensing elements, the MV and MI outputs are not necessarily accurate representations of the electrical waveform shape. These outputs tend to show high overshoot on the rising and falling edges, as a measurement artifact. These outputs are primarily for estimating the current or voltage amplitudes.)

An optional low-bandwidth SMA connection to a photo diode detector output is also available (-MD option). See the AVX-S1 datasheet at <http://www.avtechpulse.com/laser-bias/avx-s1> for more details.

At time of ordering, the customer must specify the basic model series and desired options (e.g. AVO-9A-B-P-P1B-T1B), and the customer should email Avtech (info@avtechpulse.com) a copy of the diode datasheet so that we can confirm the electrical and mechanical design of the diode. Every output module is customized to accept a particular diode pinout. If the user wishes to test more than one diode, several output modules may be needed. Pricing depends on the mechanical complexity of the output module(s).

The polarity of the pulse supplied to the output module may be changed by adding a pulse transformer (typically the AVX-3, see <http://www.avtechpulse.com/transformer/avx-3>) between the mainframe and the output module. In addition, the output modules may be detached from the mainframe and used with other pulse or CW drivers. A more detailed description of the output module is given on the AVX-S1 datasheet (available at <http://www.avtechpulse.com/laser-bias/avx-s1>).

The mainframes are slightly modified versions of standard Avtech pulse generators, as noted in the specification table. If

desired, the mainframes may be used (without the output modules) to drive a resistive load directly.

When using the output module, the pulse current through the diode load is given by:

$$I_{\text{DIODE}} = ((V_{\text{MAINFRAME}} / N) - V_{\text{DIODE}}) \div (R_S + R_{\text{DIODE}})$$

where $V_{\text{MAINFRAME}}$ is the output voltage of the mainframe, V_{DIODE} is the diode voltage, R_{DIODE} is the diode parasitic resistance, R_S is the fixed series resistance built into the output module, and N is the current-boosting ratio of the transformer in the module (if present). The minimum useful amplitude is typically 20% of the maximum amplitude. User-supplied external attenuators can normally be installed between the mainframe and the output module to reduce the effective value of $V_{\text{MAINFRAME}}$.

$R_S + R_{\text{DIODE}}$ is selected to provide a proper transmission line termination for the coaxial cabling. For the low-current models (below 2 Amps), $N = 1$ and $R_S + R_{\text{DIODE}} \approx 50\Omega$. Some higher-current models use the same arrangement, but others use a combination of current-boosting transformers (with $N = 2$ or 4) and/or multiple coaxial cables in parallel to match $R_S + R_{\text{DIODE}}$ values of 12.5, 6.2, or 3.1 Ohms.

R_{DIODE} is determined by the user's diode. Many laser diodes have minimal parasitic resistance, and $R_{\text{DIODE}} \approx 0$. (Some laser diodes have a discrete resistance added internally - some have $R_{\text{DIODE}} \approx 25\Omega$. These lasers can only be used with the drivers that require $R_S + R_{\text{DIODE}} \approx 50\Omega$.) R_{SERIES} is adjusted by Avtech for each instrument so that the correct $R_S + R_{\text{DIODE}}$ total is obtained. These models are intended for diode loads whose forward voltage drop is $\leq 3V$. The maximum obtainable current will decrease if the diode voltage is higher than this.

The AVO-9A, -9A3, -9A4, -9B, -9B1 & -9B2 families offer maximum currents of 200, 400, or 800 mA, with very fast switching times and moderate repetition rates. The AVO-9A provides up to 200 mA, narrow pulse widths of 0.4 to 4 ns, rise times of 200 ps, and pulse repetition frequencies (PRF) to 1 MHz. The AVO-9B series is similar, but with wider pulses of 5 to 100 ns. The AVO-9B1 offers a much wider pulse width range of 0.5 to 1000 ns, with slightly slower 250 ps rise times. The 400 mA AVO-9B2 family also offers a wide pulse width range (0.6 - 1000 ns), with 350 ps rise times and a maximum PRF of 100 kHz. The 800 mA AVO-9A3-B features a 0.4 to 2.0 ns (optionally 0.4 to 4.0 ns) pulse width range and PRF to 1 MHz. The similar AVO-9A4 operates from 1-10 ns at 150 kHz.

The AVO-9G, -9H, 9H1, -9L, -9M, -9P, -9W, -9X, -9Y families offer higher maximum currents (1-14A). Sub-nanosecond rise times are available for currents up to 4.5 Amps.

Instruments with the -B suffix include a complete computer control interface (see <http://www.avtechpulse.com/gpib> for details). This provides GPIB and RS-232 computer-control, as well as front panel keypad and adjust knob control of the output pulse parameters. A large backlit LCD displays the output amplitude, frequency, pulse width, and delay. To allow easy integration into automated test systems, the programming command set is based on the SCPI standard, and LabView drivers are available for download at the Avtech web site (<http://www.avtechpulse.com/labview>).

-B units also include a rear-panel Ethernet connector, allowing the instrument to be remotely controlled using the VXI-11.3, ssh, telnet, and web protocols. In particular, the VXI-11.3 features allows software like LabView to control an instrument using standard VISA communications drivers and network cabling, instead of using older-style GPIB cabling and GPIB controller cards. See <http://www.avtechpulse.com/options/vxi>.

All models may be triggered externally using a TTL-level pulse, and include a delay control and sync output for oscilloscope triggering.

Most other Avtech high-speed pulse generators can be supplied with output modules for use with laser diodes, in a


style similar to the AVO-9 series. Many aspects of the AVO-9 series can be adapted readily for particular applications. Contact Avtech (info@avtechpulse.com) with your special requirements!

A parametric search engine is available online at <http://www.avtechpulse.com/pick> to assist you in selecting the best instrument for your application. You can also speak directly to an engineer at Avtech – call us.


<http://www.avtechpulse.com/appnote/vendors> provides a list of possible sources of laser diodes for use with the AVO-9 series. Avtech does not sell laser diodes.

COMMON PACKAGES THAT CAN BE ACCOMMODATED


For butterfly devices, Avtech can provide output modules that either mate to just one side of the package (the side with the anode and cathode), or to both sides of the package (to permit access to the thermoelectric cooler and thermistor pins).

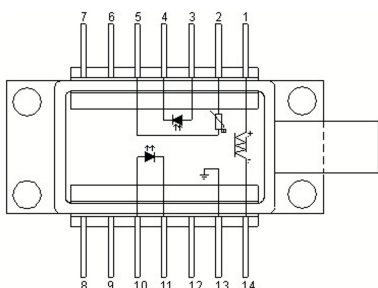


-P1B / -T1B Package Options, for butterfly packages with the anode on pin 10 and the cathode on pin 11. The -P1B option provides high-speed pin sockets for pins 8-14. To include a low-bandwidth slide-on socket for pins 1-7, add the -T1B option.

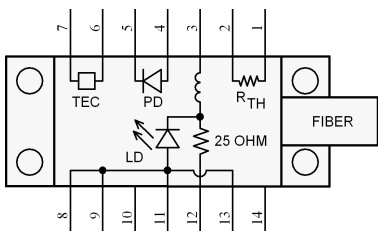


-P1C / -T1C Package Options, for butterfly packages with the anode on pin 11 and the cathode on pin 12, and an internal series resistance of ≈ 25 Ohms. The -P1C option provides high-speed pin sockets for pins 8-14. To specify an additional low-bandwidth slide-on socket for pins 1-7, add the -T1C option. If the internal resistance is 0 Ohms, use the -P1CR0 suffix instead.

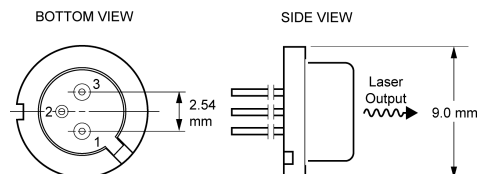

-P0 Option, generic* 5.6mm or 9 mm Package with 2.54mm pin circle diameter (PCD)

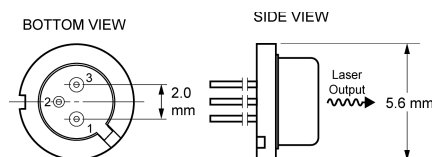

-P2 Option, generic* 5.6 mm Package with 2.0mm pin circle diameter (PCD)

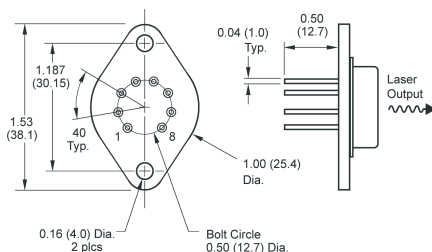

-TO3 Option, generic* TO-3 Package

* Additional details (pinout, diode resistance) must be supplied by the end-user if this option is specified.

Other packages can be accommodated. Contact Avtech with your special requirement!

OUTPUT MODULE SPECIFICATIONS / PINOUTS

Each model is customized for a specific diode's pinout and I-V characteristics. If a generic pinout option (e.g., -P0, -P1, -P2, -P3, -TO3) is selected, then a drawing showing the diode package size and electrical pinout must be provided by the end-user, and the model number and price may change. If a specific pinout option has been selected (-P1B or -P1C, for instance - see above), no additional information is required.

If you have selected the basic pulser that you need (for instance, the AVO-9A-B), but are confused about the mechanical specifications, simply email the diode datasheet to Avtech (info@avtechpulse.com) and we will provide you with the most appropriate complete model number (customized, if required).



SPECIFICATIONS

AVO-9 SERIES

Models < 1 Amp

| | | | | | | |
|---|---|----------|--------------------------------------|------------------------------------|---|-----------|
| Model ¹ : | AVO-9A-B | AVO-9B-B | AVO-9B1-B | AVO-9B2-B | AVO-9A3-B | AVO-9A4-B |
| Maximum amplitude ^{2,8} : | 200 mA | | 200 mA | 400 mA | 800 mA | 800 mA |
| Max. output of mainframe into 50Ω (V _{MAINFRAME}) ¹⁰ : | 13V | | 13V | 23V | 43V | 43V |
| R _S + R _{DIODE} ² : | 50Ω | | | | | |
| Transformer ratio, N: | 1 | | | | | |
| Allowed load voltage range: | 0 to 3V. (Contact Avtech if your diode has a higher forward voltage drop) | | | | | |
| Pulse width (FWHM): | 0.4 - 4 ns | 5-100 ns | 0.5 - 1000 ns | 0.6 - 1000 ns | 0.4-2 ns std, 0.4-4 ns opt ⁶ | 1 - 10 ns |
| Maximum duty cycle: | N/A | | 5% | 5% | NA | |
| Maximum PRF ⁷ : | 1 MHz | | 1 MHz | 100 kHz | 1 MHz | 150 kHz |
| Rise times (20%-80%): | ≤ 200 ps | | ≤ 200 ps | ≤ 200 ps | ≤ 200 ps | ≤ 500 ps |
| Fall times (80%-20%) ⁴ : | ≤ 200 ps | | <200ps, >10ns PW <420ps, <10ns PW | <200ps, >8ns PW <500ps, <8ns PW | ≤ 300 ps ⁷ | ≤ 750 ps |
| Related 50Ω series: | AVP-AV-1 | AVMP-2 | AVPP-1A | AVPP-2A | AVP-AV-HV3 | AVI-V-3L |
| Included output module: | AVX-S1 | | | | | |
| Polarity ³ : | Positive or negative (specify) | | | | | |
| GPIB and RS-232 control ¹ : | Standard on -B units. | | | | | |
| LabView drivers: | Check http://www.avtechpulse.com/labview for availability and downloads | | | | | |
| Ethernet port, for remote control using VXI-11.3, ssh, telnet, & web: | Included. Recommended as a modern alternative to GPIB / RS-232. See http://www.avtechpulse.com/options/vxi for details. | | | | | |
| Propagation delay: | ≤ 150 ns (Ext trig in to pulse out) | | | | | |
| Jitter: | ± 35 ps ± 0.015% of sync delay (Ext trig in to pulse out) | | | | | |
| DC offset or bias insertion: | Apply required DC bias current in the range of ± 100 mA to solder terminal on output module. | | | | | |
| Sync delay: | Variable 0 to 200 ns (±1 second for -B units), sync out to pulse out | | | | | |
| Sync output (to 50Ω): | +3V, 100 ns | | | | | |
| Gate input: | Synchronous or asynchronous, active high or low, switchable. Suppresses triggering when active. | | | | | |
| Trigger required: | Ext trig mode: +5 V (TTL), ≥ 50 ns | | | | | |
| Monitor output option ⁵ : | Provides connection to output of photo diode detector. | | | | | |
| Connectors: Out: Other: | User-specified socket. Sockets can be provided for 5.6 mm, 9 mm, butterfly, and other packages. Trig, Sync, Gate: BNC, Monitor: SMA | | | | | |
| Recommended accessory kit: | Add the suffix "-AK1" to the model number to include the recommended accessory kit. Consists of three SMA, 18 GHz, 2 Watt attenuators (10, 20 & 30 dB) for use on the output, and two 50 Ohm, 1 GHz, 1 Watt feed-through terminators (one SMA, one BNC) for use on external trigger inputs. | | | | | |
| Power requirements: | 100 - 240 Volts, 50 - 60 Hz | | | | | |
| Dimensions, Mainframe: (H×W×D) | 100 x 430 x 375 mm (3.9" x 17" x 14.8"). Anodized aluminum, with blue plastic trim. | | | | | |
| Dimensions, Output Module: | 41 x 66 x 76 mm (1.6" x 2.6" x 3.0"), cast aluminum, blue enamel | | | | | |
| Temperature range: | +5°C to +40°C | | | | | |

- 1) -B suffix indicates IEEE-488.2 GPIB and RS-232 control of amplitude and frequency. See <http://www.avtechpulse.com/gpib/> for details.
- 2) For operation at amplitudes of less than 20% of full-scale, best results will be obtained by setting the amplitude near full-scale and using external attenuators on the output, between the mainframe and the output module. Attenuators are available in the -AK1 accessory kit option.
- 3) Indicate desired polarity by suffixing model number with -P or -N.
- 4) The pulse width thresholds are approximate.

- 5) For photo diode output monitor option add suffix -MD.
- 6) For 0.4 to 4.0 pulse width, suffix model number with -W4. Fall time specification increases to 450 ps for units with the -W4 option.
- 7) The minimum PRF of the internal oscillator is 1 Hz on -B units. There is no minimum in the external trigger mode.
- 8) At maximum pulse width. The maximum amplitude may fall for narrower pulse widths, with reduction of < 25% at the minimum specified pulse width.



SPECIFICATIONS

AVO-9 SERIES

1 & 2 Amp Models

| | | | | |
|---|---|---------------|---------------|--------------|
| Model ¹ : | AVO-9G-B | AVO-9H-B | AVO-9H1-B | AVO-9L-B |
| Maximum amplitude ² : | 1 Amp | 2 Amp | 2 Amp | 2 Amp |
| Maximum voltage output of mainframe (V _{MAINFRAME}): | 53V (to 50Ω) | 103V (to 50Ω) | 103V (to 50Ω) | 50V (to 50Ω) |
| R _S + R _{DIODE} : | 50Ω | 50Ω | 50Ω | 12.5Ω |
| Transformer ratio, N: | 1 | 1 | 1 | 2 |
| Allowed load voltage range: | 0 to 3V. (Contact Avtech if your diode has a higher forward voltage drop) | | | |
| Pulse width (FWHM): | Standard: 15 - 200 ns -W1 option: 1 - 200 ns | | 15 - 500 ns | 1 - 20 ns |
| Maximum duty cycle: | N/A | | 2% | N/A |
| Maximum PRF ⁴ : | 100 kHz | 50 kHz | 200 kHz | 100 kHz |
| Rise time (20%-80%): | ≤ 0.5 ns | ≤ 0.7 ns | ≤ 1.5 ns | ≤ 500 ps |
| Fall time (20%-80%): | ≤ 1.0 ns | ≤ 1.5 ns | ≤ 2.5 ns | ≤ 500 ps |
| Related 50Ω series: | AVR-E2 | AVR-E3 | AVR-E3A | AVO-2L |
| Included output module: | AVX-S2 | AVX-S2 | AVX-S2 | AVX-S1-HC |
| Polarity ³ : | Positive or negative (specify) | | | |
| GPIB and RS-232 control ¹ : | Standard on -B units. | | | |
| LabView drivers: | Check http://www.avtechpulse.com/labview for availability and downloads | | | |
| Ethernet port, for remote control using VXI-11.3, ssh, telnet, & web: | Included. Recommended as a modern alternative to GPIB / RS-232. See http://www.avtechpulse.com/options/vxi for details. | | | |
| Propagation delay: | ≤ 150 ns (Ext trig in to pulse out) | | | |
| Jitter: | ± 35 ps ± 0.015% of sync delay (Ext trig in to pulse out) | | | |
| DC offset or bias insertion: | Apply required DC bias current in the range of ± 100 mA to solder terminal on output module. | | | |
| Sync delay: | Variable 0 to ±1 second, sync out to pulse out | | | |
| Sync output: | + 3 Volts, 100 ns, will drive 50 Ohms | | | |
| Gate input: | Synchronous or asynchronous, active high or low, switchable. Suppresses triggering when active. | | | |
| Trigger required: | External trigger mode: TTL-level pulse (LO = 0V, HI = 3-5V), ≥ 10 ns | | | |
| Photodiode output option ⁵ : | Provides connection to output of photo diode detector. (Requires a photodiode in the device under test.) | | | |
| Connectors: | User-specified socket. Sockets can be provided for 5.6 mm, 9 mm, butterfly, and other packages. | | | |
| Out: | Trig, Sync, Gate: BNC, Monitor: SMA | | | |
| Other: | | | | |
| Recommended accessory kit: | Add the suffix "-AK2" to the model number to include the recommended accessory kit. Consists of one SMA 12 GHz 20 Watt attenuator (20 dB) and two SMA 18 GHz 2 Watt attenuators (10 & 20 dB) for use on the output, and two 50 Ohm, 1 GHz, 1 Watt feed-through terminators (one SMA, one BNC) for use on external trigger inputs. | | | |
| Power requirements: | 100 - 240 Volts, 50 - 60 Hz | | | |
| Dimensions: | Mainframe: 100 x 430 x 375 mm (3.9" x 17" x 14.8"), anodized aluminum, with blue plastic trim | | | |
| (H×W×D) Output module: | 41 x 66 x 76 mm (1.6" x 2.6" x 3.0"), cast aluminum, blue enamel | | | |
| Temperature range: | +5°C to +40°C | | | |

1) -B suffix indicates IEEE-488.2 GPIB and RS-232 control of amplitude and frequency. See <http://www.avtechpulse.com/gpib/> for details.

2) For operation at amplitudes of less than 20% of full-scale, best results will be obtained by setting the amplitude near full-scale and using external attenuators on the output, between the mainframe and the output module. Attenuators are available in the -AK1 accessory kit option.

3) Indicate desired polarity by suffixing model number with -P or -N (i.e. positive or negative).

4) The minimum PRF of the internal oscillator is 1 Hz on -B units. There is no minimum in the external trigger mode.

5) For photo diode output monitor option add suffix -MD.

≥ 2 Amp Models

| | | | | | |
|---|---|---------------|---------------|---------------|----------|
| Model ¹ : | AVO-9M-B | AVO-9P-B | AVO-9W-B | AVO-9X-B | AVO-9Y-B |
| Maximum amplitude ^{2,6} : | 4.5 Amp | 5 Amp | 10 Amp | 8A | 14A |
| Maximum voltage output of mainframe (V _{MAINFRAME}): | 125V (to 50Ω) | 125V (to 50Ω) | 125V (to 25Ω) | 400V (to 50Ω) | |
| R _S + R _{DIODE} : | 10Ω | 12.5Ω | 6.2Ω | 50Ω | 12.5Ω |
| Transformer ratio, N: | 2 | 2 | 2 | 1 | 2 |
| Allowed load voltage range: | 0 to 3V. (Contact Avtech if your diode has a higher forward voltage drop) | | | | |
| Pulse width (FWHM): | 1 - 10 ns | 4 - 50 ns | | 8 - 100 ns | |
| Maximum duty cycle: | N/A | | | | |
| Maximum PRF ⁴ : | 20 kHz | 40 kHz | 20 kHz | 2 kHz | |
| Rise time (20%-80%): | ≤ 1 ns | ≤ 2.5 ns | | ≤ 4 ns | |
| Fall time (20%-80%): | ≤ 1 ns | ≤ 3.5 ns | | ≤ 5 ns | |
| Related 50Ω series: | AVO-2M | AVO-2A | AVO-2W | AVL-5 | |
| Included output module: | AVX-S3A | AVX-S3A | AVX-S3C | P/N TBD | |
| Polarity ³ : | Positive or negative (specify) | | | | |
| GPiB and RS-232 control ¹ : | Standard on -B units. | | | | |
| LabView drivers: | Check http://www.avtechpulse.com/labview for availability and downloads | | | | |
| Ethernet port, for remote control using VXI-11.3, ssh, telnet, & web: | Included. Recommended as a modern alternative to GPiB / RS-232. See http://www.avtechpulse.com/options/vxi for details. | | | | |
| Propagation delay: | ≤ 150 ns (Ext trig in to pulse out) | | | | |
| Jitter: | ± 35 ps ± 0.015% of sync delay (Ext trig in to pulse out) | | | | |
| DC offset or bias insertion: | Apply required DC bias current in the range of ± 100 mA to solder terminal on output module. | | | | |
| Sync delay: | Variable 0 to ±1 second, sync out to pulse out | | | | |
| Sync output: | + 3 Volts, 100 ns, will drive 50 Ohms | | | | |
| Gate input: | Synchronous or asynchronous, active high or low, switchable. Suppresses triggering when active. | | | | |
| Trigger required: | External trigger mode: TTL-level pulse (LO = 0V, HI = 3-5V), ≥ 10 ns | | | | |
| Photodiode output option ⁵ : | Provides connection to output of photo diode detector. (Requires a photodiode in the device under test.) | | | | |
| Connectors: Out: Other: | User-specified socket. Sockets can be provided for 5.6 mm, 9 mm, butterfly, and other packages. Trig, Sync, Gate: BNC, Monitor: SMA | | | | |
| Recommended accessory kit: | Add the suffix "-AK2" to the model number to include the recommended accessory kit. Consists of one SMA 12 GHz 20 Watt attenuator (20 dB) and two SMA 18 GHz 2 Watt attenuators (10 & 20 dB) for use on the output, and two 50 Ohm, 1 GHz, 1 Watt feed-through terminators (one SMA, one BNC) for use on external trigger inputs. | | | | |
| Power requirements: | 100 - 240 Volts, 50 - 60 Hz | | | | |
| Dimensions: Mainframe: (H×W×D) Output module: | 100 x 430 x 375 mm (3.9" x 17" x 14.8") , anodized aluminum, with blue plastic trim 41 x 66 x 76 mm (1.6" x 2.6" x 3.0"), cast aluminum, blue enamel | | | | |
| Temperature range: | +5°C to +40°C | | | | |

1) -B suffix indicates IEEE-488.2 GPB and RS-232 control of amplitude and frequency. See <http://www.avtechpulse.com/gpb/> for details.

2) For operation at amplitudes of less than 20% of full-scale, best results will be obtained by setting the amplitude near full-scale and using external attenuators on the output, between the mainframe and the output module.

3) Indicate desired polarity by suffixing model number with -P or -N (i.e. positive or negative).

4) The minimum PRF of the internal oscillator is 1 Hz on -B units. There is no minimum in the external trigger mode.


5) For photo diode output monitor option add suffix -MD.

AVO-9W-B MAINFRAME




The cables lead to the output module, not shown.
(See below and next page for typical output modules.)


TYPICAL AVO-9B-C SYSTEM, FOR A 9 mm TO-18 LASER DIODE

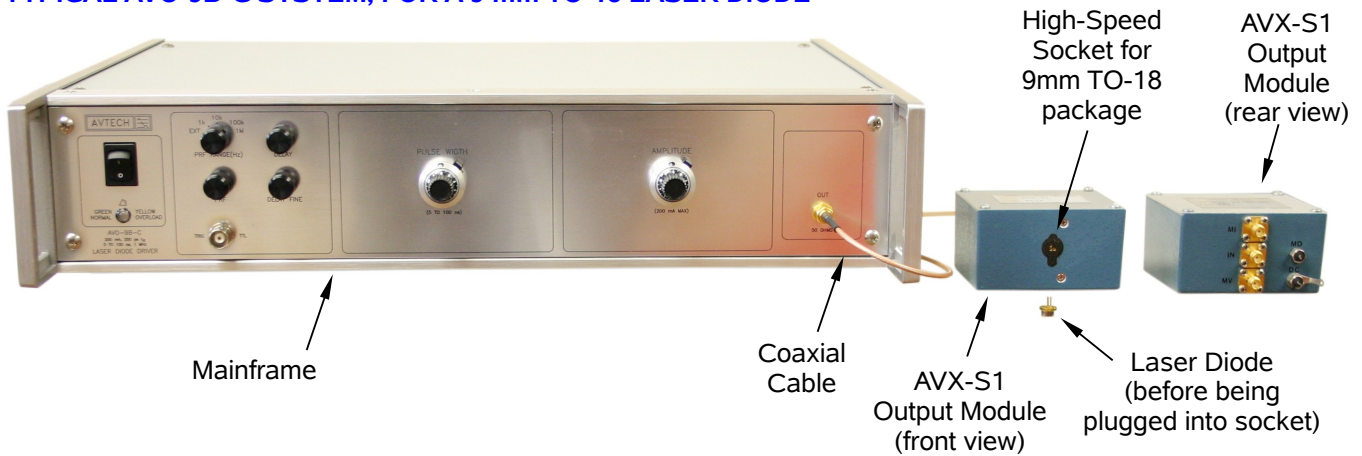

AVX-S1-P1B & AVX-S2-P1B Functional Equivalent Circuit

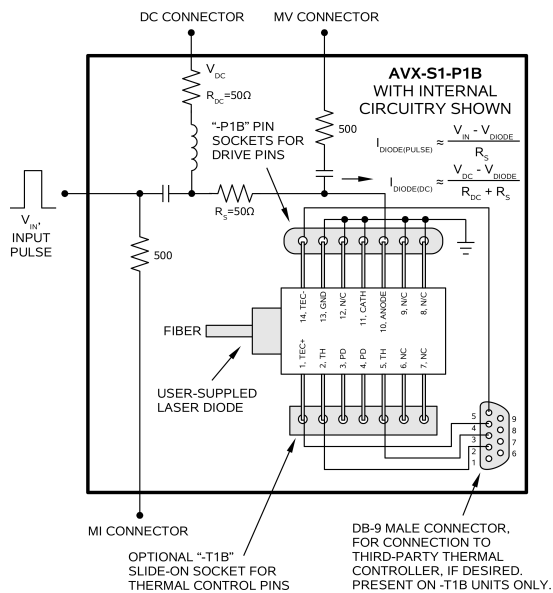


AVX-S1-P0 & AVX-S2-P2 Typical Functional Equivalent Circuit

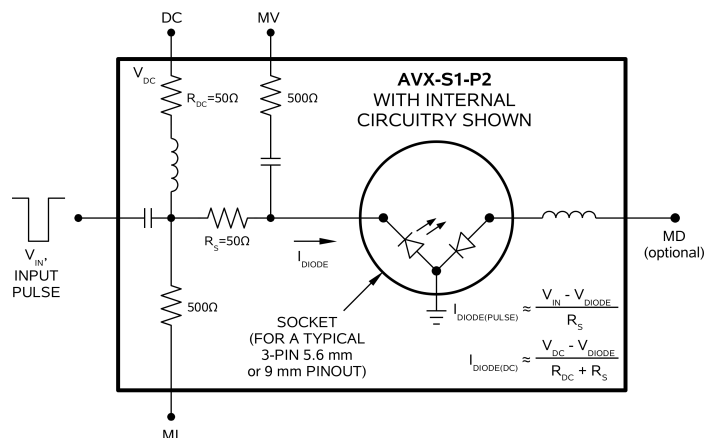

The pinouts of the -P0 and -P2 sockets are normally customized to match the actual pinout of the users' diode.

The exact pin configuration of the diode package must be specified at the time of ordering, so that a suitable socket can be provided. See the AVX-S1 datasheet (<http://www.avtechpulse.com/laser-bias/avx-s1>) for more information and for examples of packages that can be accommodated.


OUTPUT MODULE FOR A BUTTERFLY-PACKAGED DIODE, WITHOUT THE -T1B OR -T1C OPTIONS

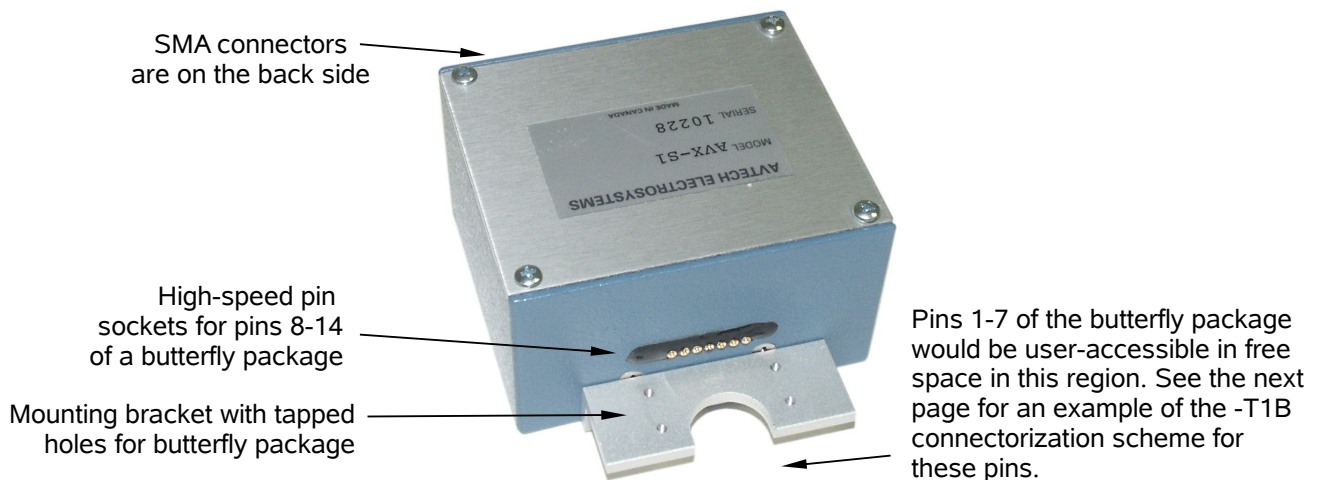


SAMPLE OUTPUT MODULE FOR A BUTTERFLY-PACKAGED DIODE, WITH THE -T1B OR -T1C OPTIONS

The photos below show the procedure from inserting a typical pigtailed device into an output module with the -P1B and -T1B options (or the -P1C and -T1C options). This is just an example; your diode may differ. (For instance, the fiber may exit the diode on the opposite side.)


Step 1 - Understand the Mechanical Aspects

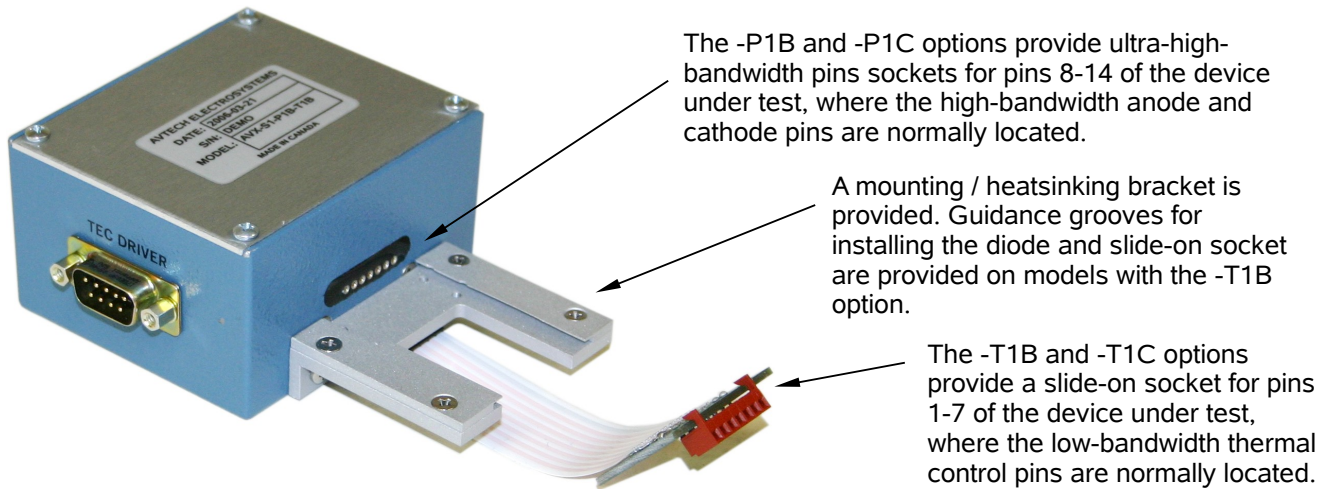

Step 2 - Insert the Diode into the High-Bandwidth Pin Sockets

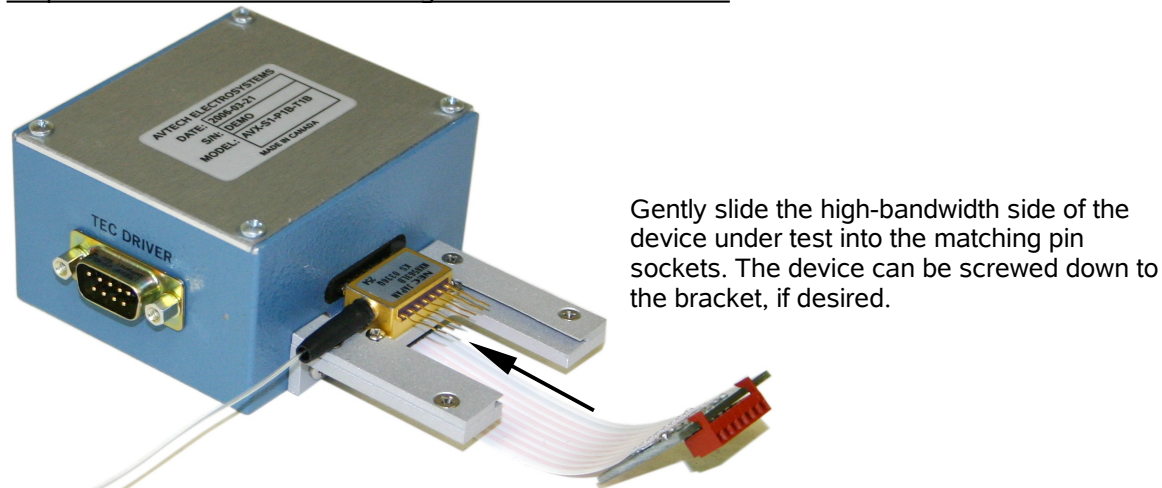


Step 3 - Install the Slide-On Socket on the Low-Bandwidth Pins

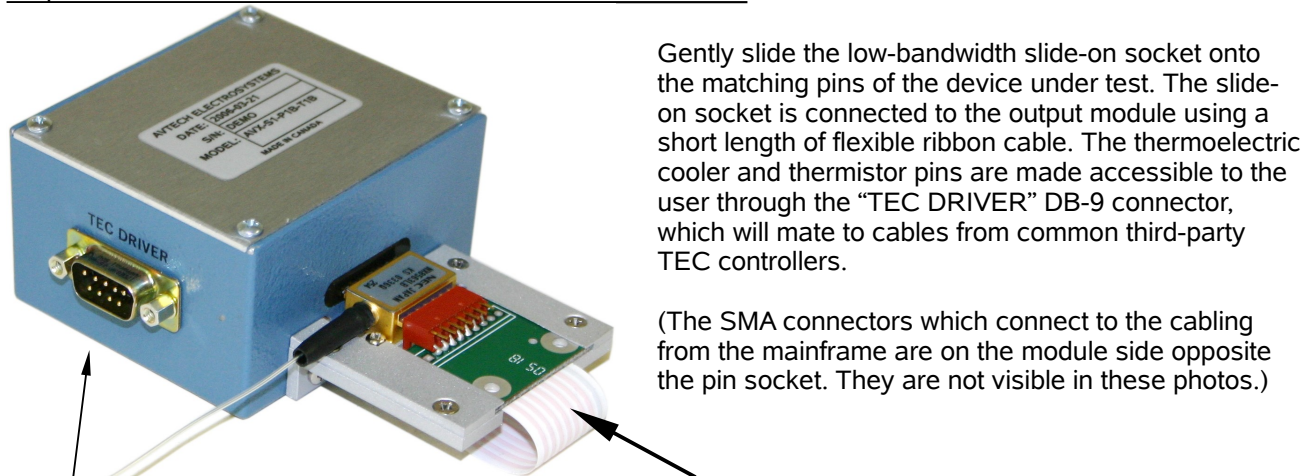

(The SMA connectors which connect to the cabling from the mainframe are on the module side opposite the pin socket. They are not visible in these photos.)

TYPICAL OUTPUT MODULE DIMENSIONS (APPROXIMATE)

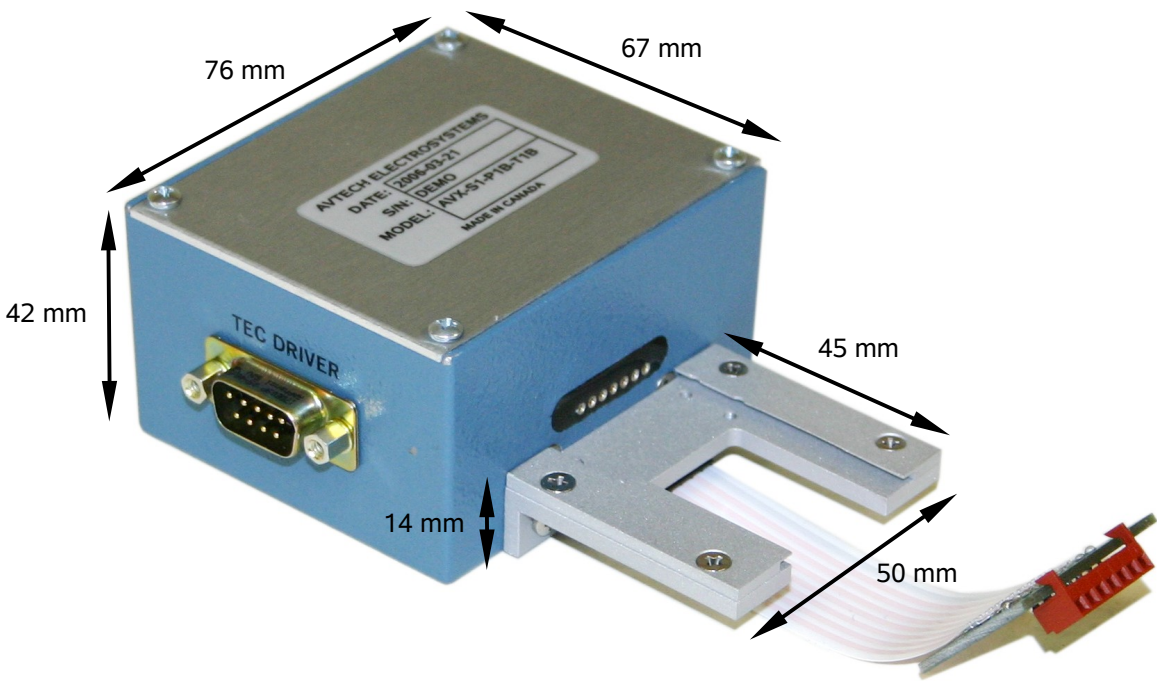

TYPICAL MOUNTING HOLE PATTERN (BOTTOM VIEW)

