



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET


Model: AVR-EBF6-B-F20NS  
Type: Forward Recovery Test System  
S.N.: 12433  
Date: May 20, 2010

Output Amplitude: 100 mA to 1 A  
Pulse Width (FWHM): 200 ns to 10 us  
Rise Time (10%-90%): 10 ns or 20 ns  
(depends on filter used)  
PRF: 1 Hz - 100 Hz  
Jitter, Stability: OK  
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →

Test Waveforms

1N5819 waveform, 10 ns filter

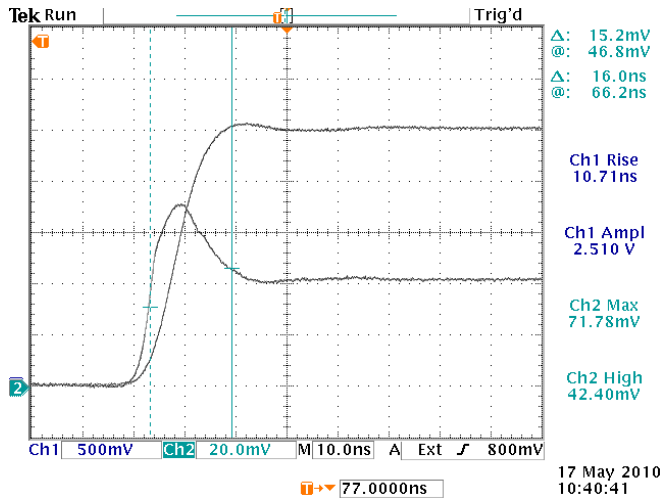


Step waveform: MON output ( $V_{IN}/10$ , +25.5V, with ~10 ns rise time). 500 mV/div, 10 ns/div.

Peaked waveform: Main output ( $V_{DUT}/10$ ). 20 mV/div, 10 ns/div.

Shows  $V_{FM} = 0.7178V$ , and  $t_{FR} = 16.0$  ns for  $I_F = 500$  mA, using the recovery point 10% above steady state.

Tested using the supplied AVX-TFR-MIX test jig and the standard AVX-FILT-10NS filter.

1N5819 waveform, 20 ns filter

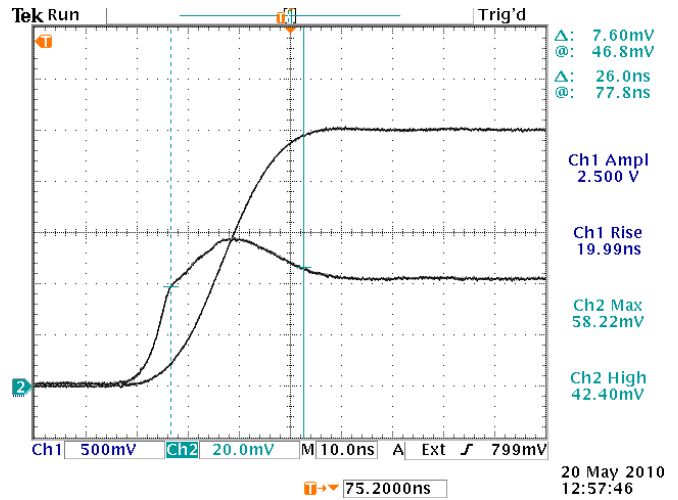


Step waveform: MON output ( $V_{IN}/10$ , +25.5V, with ~20 ns rise time). 500 mV/div, 10 ns/div.

Peaked waveform: Main output ( $V_{DUT}/10$ ). 20 mV/div, 10 ns/div.

Shows  $V_{FM} = 0.5822V$ , and  $t_{FR} = 26.0$  ns for  $I_F = 500$  mA, using the recovery point 10% above steady state.

Tested using the supplied AVX-TFR-MIX test jig and the standard AVX-FILT-20NS filter.

PMEG3020DEP115 waveform, 10 ns filter

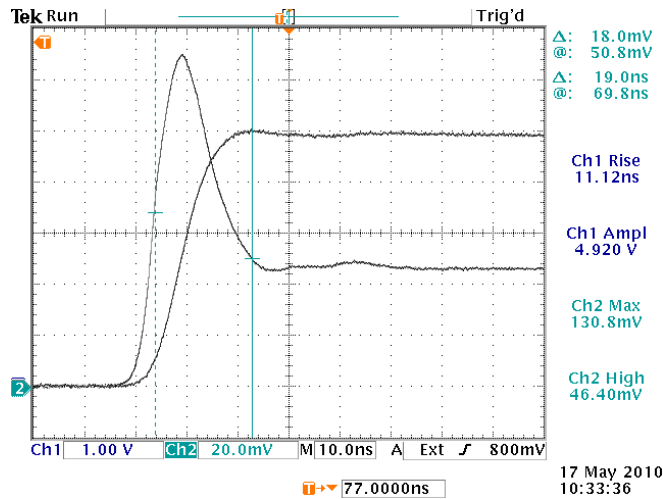


Step waveform: MON output ( $V_{IN}/10$ , +50V, with ~10 ns rise time). 1V/div, 10 ns/div.

Peaked waveform: Main output ( $V_{DUT}/10$ ). 20 mV/div, 10 ns/div.

Shows  $V_{FM} = 1.308V$ , and  $t_{FR} = 19.0$  ns for  $I_F = 1A$ , using the recovery point 10% above steady state.

Tested using the supplied AVX-TFR-MELF-NXPA test jig and the standard AVX-FILT-10NS filter.

PMEG3020DEP115 waveform, 20 ns filter

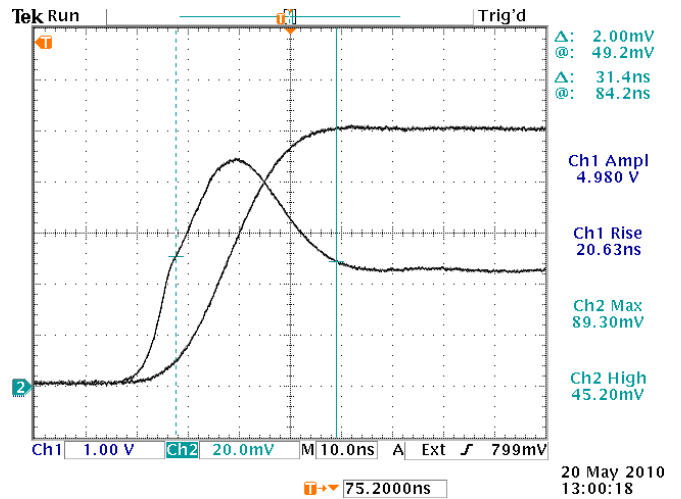


Step waveform: MON output ( $V_{IN}/10$ , +50V, with ~20 ns rise time). 1V/div, 10 ns/div.

Peaked waveform: Main output ( $V_{DUT}/10$ ). 20 mV/div, 10 ns/div.

Shows  $V_{FM} = 0.893V$ , and  $t_{FR} = 31.4$  ns for  $I_F = 1A$ , using the recovery point 10% above steady state.

Tested using the supplied AVX-TFR-MELF-NXPA test jig and the standard AVX-FILT-20NS filter.

PMEG2020DEP115 waveform, 10 ns filter

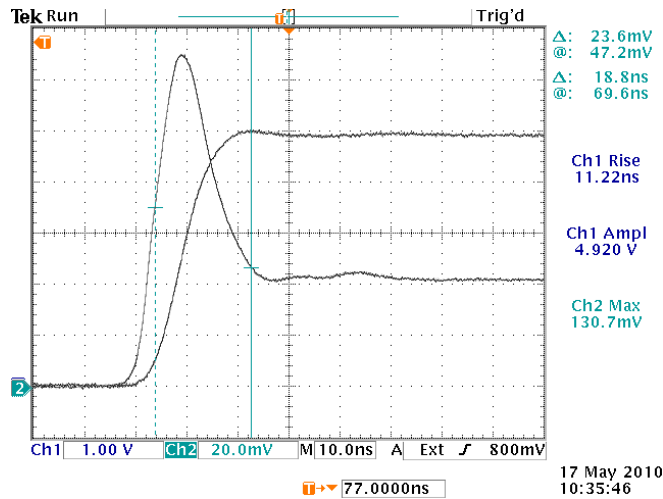


Step waveform: MON output ( $V_{IN}/10$ , +50V, with ~10 ns rise time). 1V/div, 10 ns/div.

Peaked waveform: Main output ( $V_{DUT}/10$ ). 20 mV/div, 10 ns/div.

Shows  $V_{FM} = 1.307V$ , and  $t_{FR} = 18.8$  ns for  $I_F = 1A$ , using the recovery point 10% above steady state.

Tested using the supplied AVX-TFR-MELF-NXPA test jig and the standard AVX-FILT-10NS filter.

PMEG2020DEP115 waveform, 20 ns filter

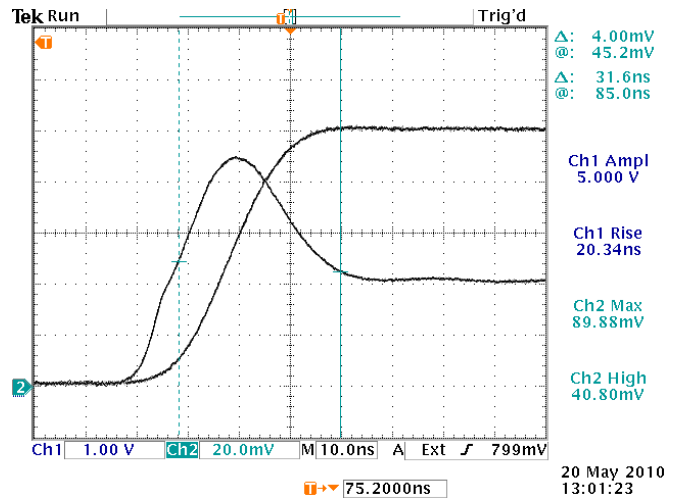

Step waveform: MON output ( $V_{IN}/10$ , +50V, with ~20 ns rise time). 1V/div, 10 ns/div.

Peaked waveform: Main output ( $V_{DUT}/10$ ). 20 mV/div, 10 ns/div.

Shows  $V_{FM} = 0.8988V$ , and  $t_{FR} = 31.6$  ns for  $I_F = 1A$ , using the recovery point 10% above steady state.

Tested using the supplied AVX-TFR-MELF-NXPA test jig and the standard AVX-FILT-20NS filter.

Note: All sample DUTs were ordered through distributors, and were not provided by the customer.