



# AVTECH ELECTROSYSTEMS LTD.

NANOSECOND WAVEFORM ELECTRONICS  
SINCE 1975

P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

## PERFORMANCE CHECKSHEET

Model: AVR-EB2A-B  
Type: Semiconductor Device Tester  
S.N.: 12366  
Date: January 11, 2010


Output Amplitude: to +100 mA, -100 mA  
Pulse Width (FWHM): 200 ns  
Switching Time,  
+ to -, 10%-90%: ≤ 300 ps (at mainframe)  
PRF: 1 - 10 kHz  
Jitter, Stability: OK  
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →

### Test Waveforms


With a 1N4148 installed in the AVX-CA-AR1 test jig, 40 mA/div, 2 ns/div:

Pulse output directly from mainframe, with the test jig bypassed (2 V/div, 2 ns/div):

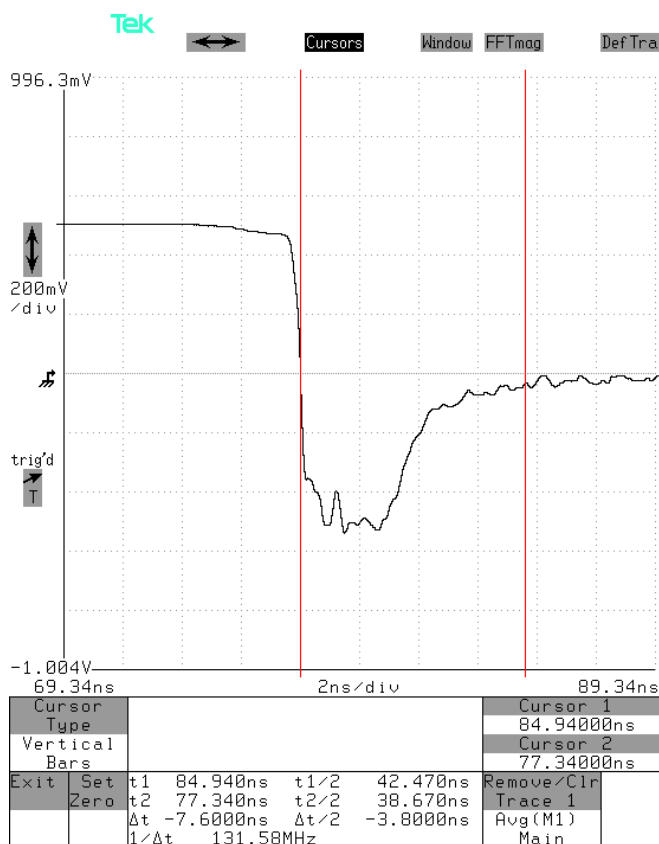

$I_F = +100 \text{ mA}$ ,  $I_R = -100 \text{ mA}$

Measured  $t_{RR} = 7.6 \text{ ns}$ .

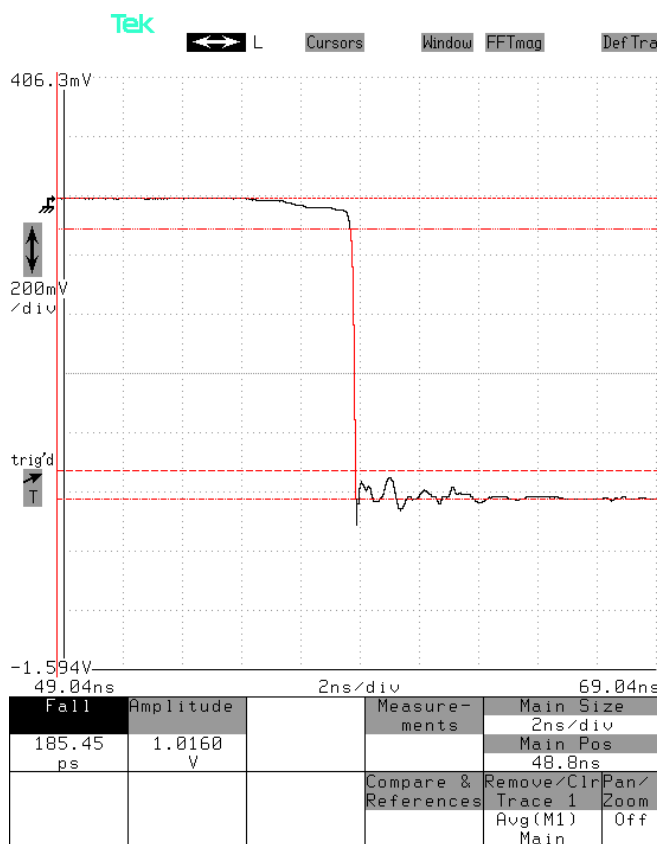

Shows a 10%-90% transition time of 185 ps.

For more sample waveforms, please see the "Typical Results" section of the manual.