



AVTECH ELECTROSYSTEMS LTD.

NANOSECOND WAVEFORM ELECTRONICS
SINCE 1975

□ P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-226-5772 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-226-2802 (Intl)

☒ BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVMP-3-B-P-OT-ELA-R5
Type: Ultra-High-Speed Pulse Generator
S.N.: 11686
Date: March 26, 2007


Output Amplitude: 0 to $\pm 20V$, to 50 Ω
Pulse Width (FWHM): 8 – 100 ns
Rise Time (20%-80%): ≤ 200 ps
Fall Time (80%-20%): ≤ 300 ps
PRF: 1 Hz - 1 MHz
Jitter, Stability: OK
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →

Test Waveforms


Leading edge at 100 kHz, 80 ns, +20V,

0.5 ns/div. 10 V/div (100 mV \times 40 dB):

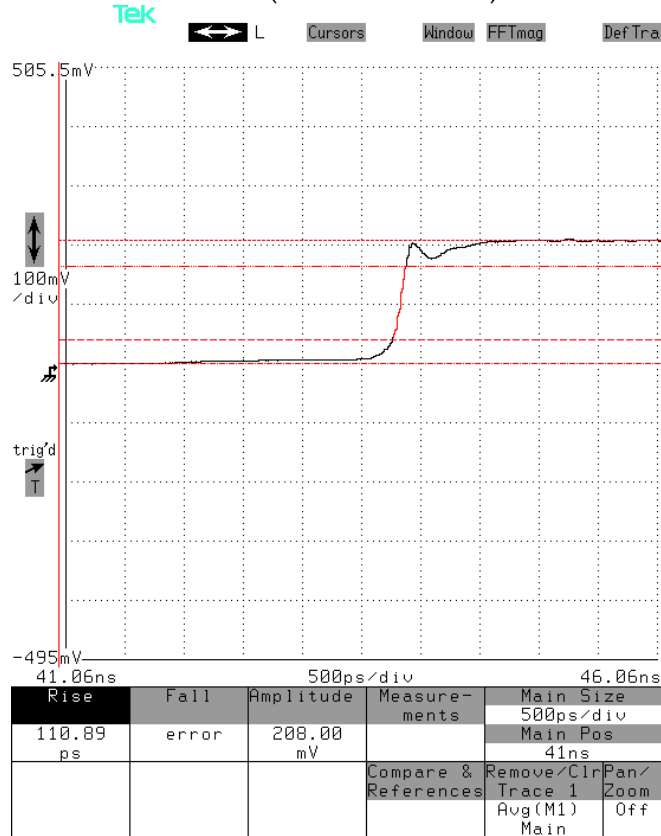

Trailing edge at 100 kHz, 80 ns, +20V,

1 ns/div. 10 V/div (100 mV \times 40 dB):

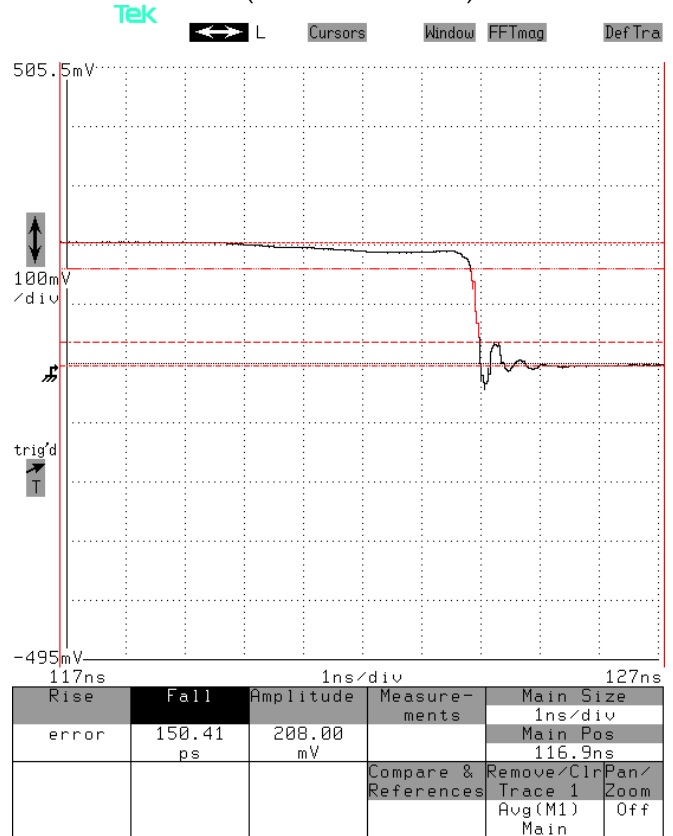

Full pulse at 100 kHz, 80 ns, +20V,

10 ns/div. 10 V/div (100 mV × 40 dB):

