



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H5

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVO-9B1-B-P-P6-AK8-AC06  
Type: Ultra-High-Speed Laser Diode Driver  
S.N.: 13398  
Date: February 18, 2016

Output Amplitude: up to +13V, to 50Ω  
Pulse Width (FWHM): 0.5 – 1000 ns  
Rise Time (20%-80%): ≤ 250 ps  
Fall Time (80%-20%): ≤ 250 ps  
PRF: 1 Hz – 1 MHz  
Jitter, Stability: OK  
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms

Mainframe output into 50 Ohm load at 10 kHz,  
500 ps, +13V,

Mainframe output into 50 Ohm load at 10 kHz,  
5 ns, +13V,


500 ps/div. 5 V/div (50 mV/div × 40 dB):

2 ns/div. 5 V/div (50 mV/div × 40 dB):

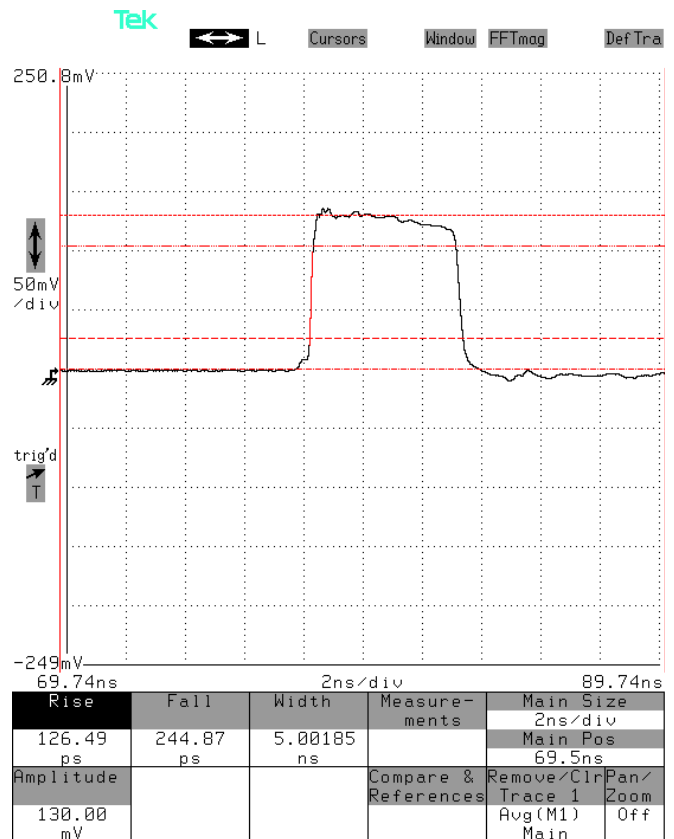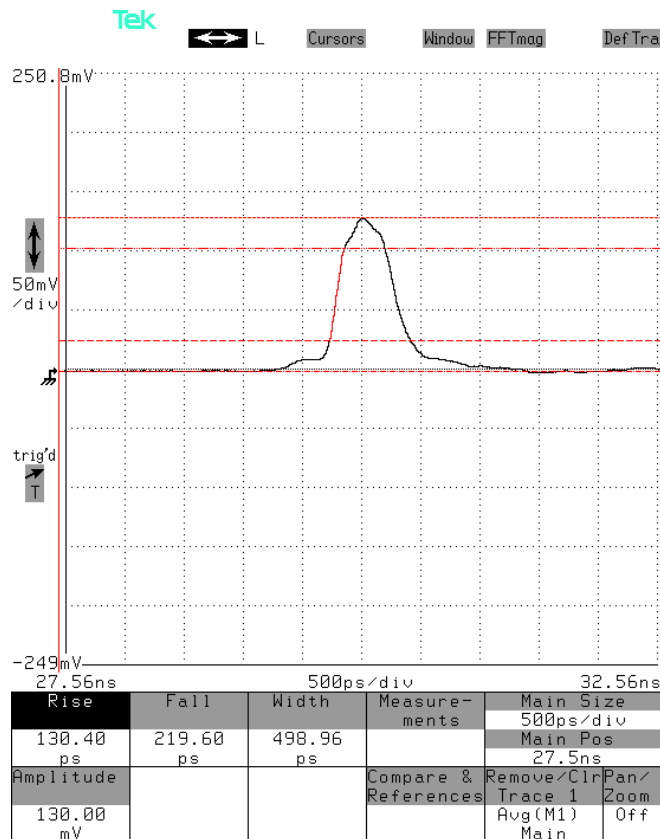

Mainframe output into 50 Ohm load at 10 kHz,  
25 ns, +13V,

5 ns/div. 5 V/div (50 mV/div × 40 dB):

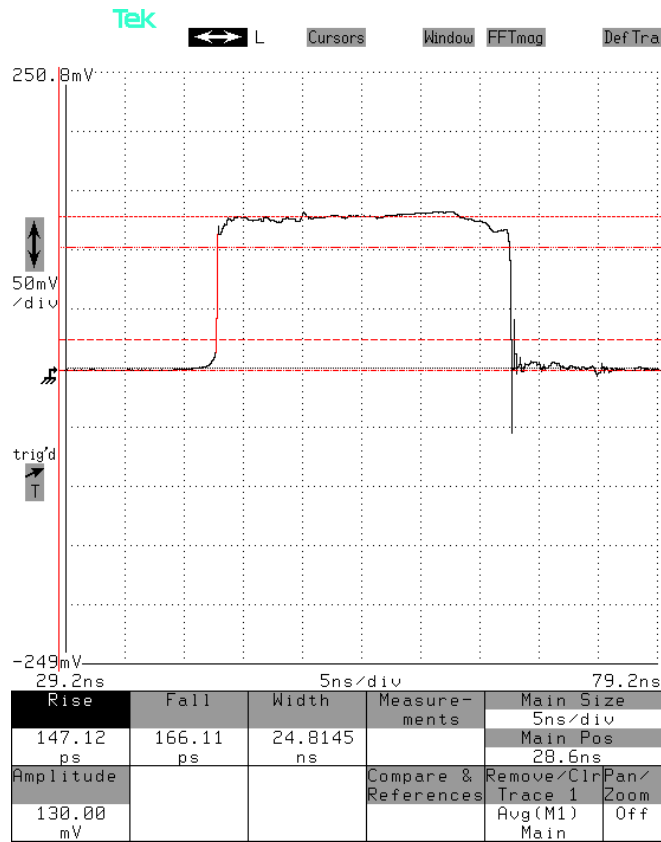

Mainframe output into 50 Ohm load at 10 kHz,  
1 us, +13V,

200 ns/div. 5 V/div (50 mV/div × 40 dB):

