



AVTECH ELECTROSYSTEMS LTD.

NANOSECOND WAVEFORM ELECTRONICS
SINCE 1975

P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802

TEL: 1-800-265-6681
FAX: 1-800-561-1970
U.S.A. & CANADA

e-mail: info@avtechpulse.com

BOX 5120 STN. F
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802

INSTRUCTIONS


MODEL AVB1-3-AR1 MONOCYCLE GENERATOR

S.N. :

WARRANTY

Avtech Electrosystems Ltd. warrants products of its manufacture to be free from defects in material and workmanship under conditions of normal use. If, within one year after delivery to the original owner, and after prepaid return by the original owner, this Avtech product is found to be defective, Avtech shall at its option repair or replace said defective item. This warranty does not apply to units which have been disassembled, modified or subjected to conditions exceeding the applicable specifications or ratings. This warranty is the extent of the obligation or liability assumed by Avtech with respect to this product and no other warranty or guarantee is either expressed or implied.

MONOCYCLE GENERATOR TEST ARRANGEMENT

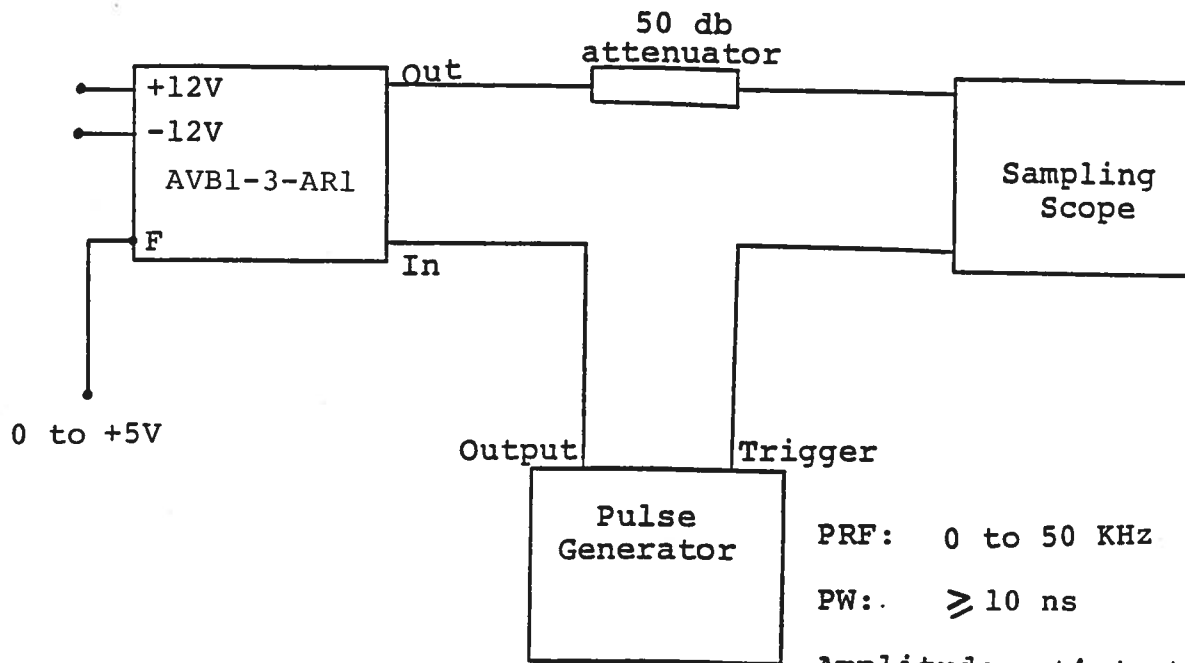

PRF: 0 to 50 KHz


PW: \geq 10 ns

Amplitude: +4 to +30 volts


Note that input
contains series
250 volt DC
blocking
capacitor

Notes:

- 1) The bandwidth capability of components and instruments used to display the monocycle generator output signal (attenuators, cables, connectors, etc.) should exceed 10 GHz.
- 2) The use of a 50 dB attenuator will insure a peak input signal to the sampling scope of less than one Volt.
- 3) In general, the pulse generator delay control should be set in the 100 ns range. Other settings should be as shown in the above diagram. The monocycle generator output is delayed with respect to the trigger input signal by about 30 ns (typically).
- 4) The monocycle generator can withstand an infinite VSWR on the output port.
- 5) The output frequency is approx. 1000 MHz when 0 V is applied to the F solder terminal and 500 MHz when +5V is applied to the F solder terminal ($R_{IN} \geq 10K$). Note that the frequency may be continuously varied from 500 to 1000 MHz by varying the voltage from 5 to 0 Volts.
- 6) The P and N pots are for minor adjustments to the widths of the positive and negative voltage swings. Clockwise rotation of the pots increases the widths. The T pot is for minor adjustment to the separation of the positive and negative swings (when in 500 MHz mode only). Clockwise rotation of the pot increases the separation. At time of shipping the pots were adjusted for 500 and 1000 MHz operation.
- 7) A 4.7K resistor is attached on the rear panel between a solder terminal and ground. **CAUTION:** This resistance should not be less than 2.2K. Also insure that the solder terminal is never shorted to ground.

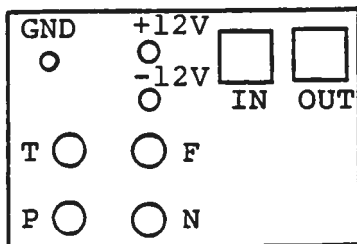

FRONT VIEW



REAR VIEW

AVTECH**AVTECH ELECTROSYSTEMS LTD.**NANOSECOND WAVEFORM ELECTRONICS
SINCE 1975□ P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802TEL: 1-800-265-6681
FAX: 1-800-561-1970
U.S.A. & CANADA☒ BOX 5120 STN. F
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802

Fax Ref No: 10898 From: Avtech Electrosystems Ltd.

To: Applied Research Our Fax No: (613) 226-2802

Tel: 603-595-4714 Date: June 12/95

Attn: Rex Morey Receivers Fax No: 603-595-4809

Subject: 500 - 1000 MHz Monocycle No. of pages: 2
Generator

As per our recent telephone conversation, I am pleased to provide a price and delivery quotation for a special purpose monocycle generator meeting the following specifications:

Model designation: AVB1-3-AR1 (this unit is equivalent to Model AVD-GSSA1C).

Output frequency: 500 MHz to 1000 MHz (continuously variable). Output frequency controlled by potential (0 to +5 volts) applied to solder terminal ($R_{IN} \approx 2.2K$)

Output amplitude: ≥ 50 volts peak to peak.
(to 50 Ohms)

PRF: 0 to 50 KHz.
Equals input trigger PRF.

Trigger: +4 to +30 Volts
 $PW \geq 10$ ns.

Propagation delay: ≈ 40 ns.

Output spurious level: ≤ 26 dB.

Temperature range: 0° C to 40° C.

Prime power: +12 VDC, 150 mA max.
-12 VDC, 30 mA max.

Package size: 1.6" x 3.0" x 6.0",
Cast aluminum, blue enamel.

Weight: 1.75 lbs.

Connectors:
Input, output: SMA.
Power and control: Solder terminals.


Other: See Model AVB1-3, page 92,
Cat. No. 9.

Price: \$1,992.00 US, FOB destination. For
quantities of 2 to 10, deduct 1%
from each additional unit.

Delivery: 60 days (quantity of 1).

Thank you for your continuing interest in our products. Please
call me again (1-800-265-6681) if you require any additional
information.

Rgds



Dr. Walter Chudobiak
Chief Engineer

WC:mhd

Aug. 16/95

Dist: AVA, AVB

Name: AVB13AR1.INS