


PULSE GENERATOR  
PERFORMANCE CHECK

Model: AVO-2

S.N.: 273

Date: JAN 4 80

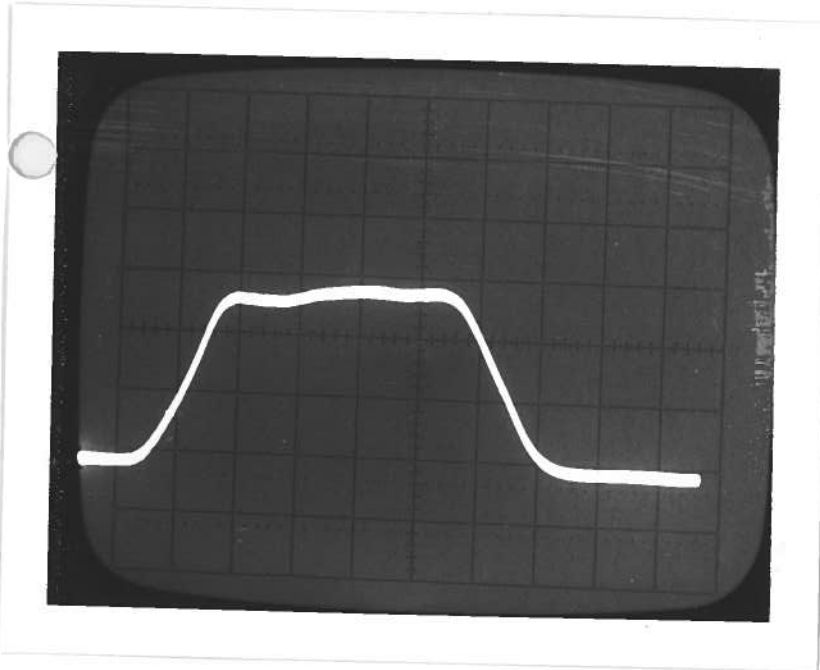

~ 4 AMPS DIV.  
2.0 NSEC / DIV  
20 KHZ.

- a) Output signal amplitude: <sup>\*</sup>  
0 TO 10 AMPS
  - b) Pulse width:  
0 TO 10 NSEC.
  - c) Rise time:  
≤ 1.5 NSEC
  - d) Fall time:  
≤ 2.0 NSEC.
  - e) PRF:  
0 TO 20 KHZ.
  - f) Jitter, stability:  
OK.
  - g) Prime power:  
+15 ± 1.0 VOLT  
300 mA.
  - h) TEMP CHECKED DOWN  
TO -20°C.
- 
- \* USEFUL TO  
15 AMPS