


PULSE GENERATOR
PERFORMANCE CHECK

Model: AUL-2A-P-T-W-PS


S.N.: 1206

Date: MAR 8 63

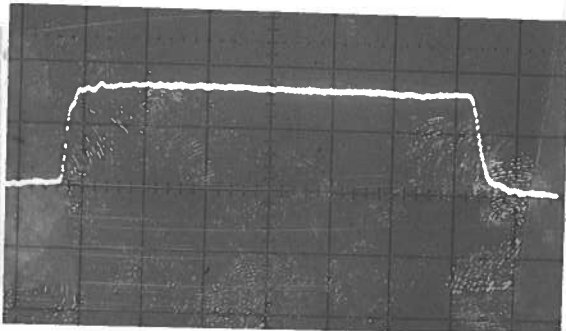

100 VOLTS/DIV
10 NSEC/DIV

TR MIN
4 KHZ

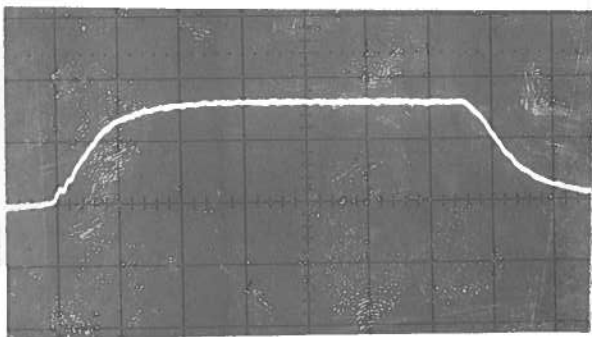

100 VOLTS/DIV
10 NSEC/DIV

TR MAX
4 KHZ

- a) Output signal amplitude:
0 to +170 V
- b) Pulse width: *
0 TO 400 NSEC
- c) Rise time:
1/2 1 NSEC TO 10 NSEC
- d) Fall time:
1/2 2 NSEC TO 10 NSEC.
- e) PRF:
0 TO 5 KHZ
- f) Jitter, stability:
OK
- g) Prime power:
120/240 V
50 - 60 Hz.

* FOR 100 TO 400 NSEC
RANGE REQUIRES
ADDITION DELAY
CABLE AND PER
INSTRUCTIONS