


PULSE GENERATOR
PERFORMANCE CHECK


Model: *ANMK-2-DN-TRF-C.*

S.N.: *2079*

Date: *DEC 7 1984*

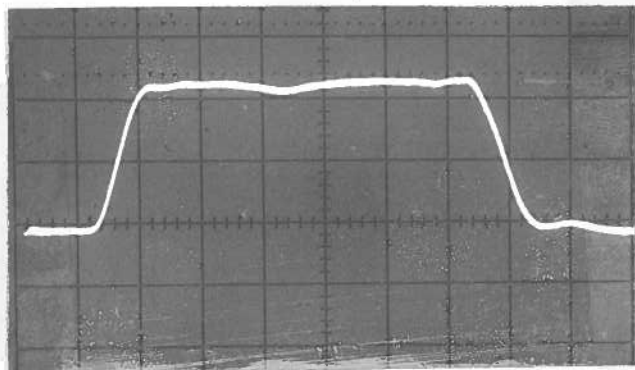

*10 VOLTS/DIV.
5 NSEC/DIV
2 MHz.
(HIGH TR-TF)*

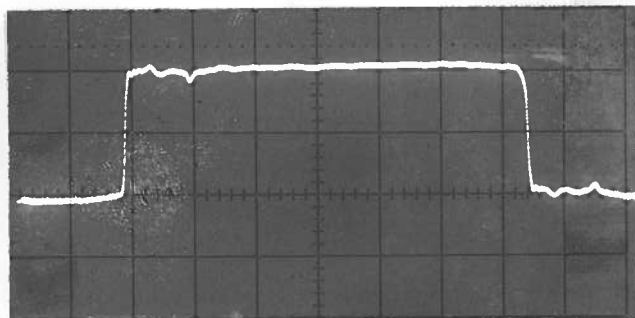

*10 VOLTS/DIV.
5 NSEC/DIV
2 MHz
(Low TR-TF)*

- a) Output signal amplitude:
0 TO ± 20 VOLTS.
- b) Pulse width:
20 TO 200. NSEC
- c) Rise time:
0.3 OR 3.0 NSEC
- d) Fall time:
0.3 OR 3.0 NSEC
- e) PRF: *0 TO 10 MHz*
(0 TO 5 MHz IN LOW TR-TF)
- f) Jitter, stability: *OK*
- g) Prime power:

*110/220 V,
50 - 60 Hz.*