


PULSE GENERATOR
PERFORMANCE CHECK

Model: *AVR-3-PW-C-USA*


S.N.: *2245*

Date: *APRIL 22 85*

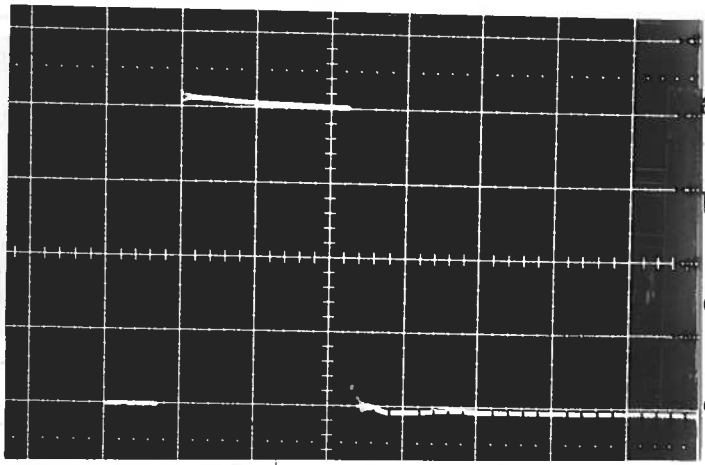

- a) Output signal amplitude: *0 TO +200 V. TO*
- b) Pulse width: ~~40~~ *33 TO 50 μ s*
(40 μ s)
- c) Rise time: *0.1 TO 100 nSEC*
 ≤ 10 nSEC
- d) Fall time: *≤ 10 nSEC*
- e) PRF: *0 TO 1 kHz (MAX. PUL)*
- f) Jitter, stability: *0 TO 50 Hz (MAX. PUL)*
OK
- g) Prime power:

Ⓐ *50 VOLT/DIV*
0.5 μ SEC/DIV
500 Hz
R_L = 33 Ω

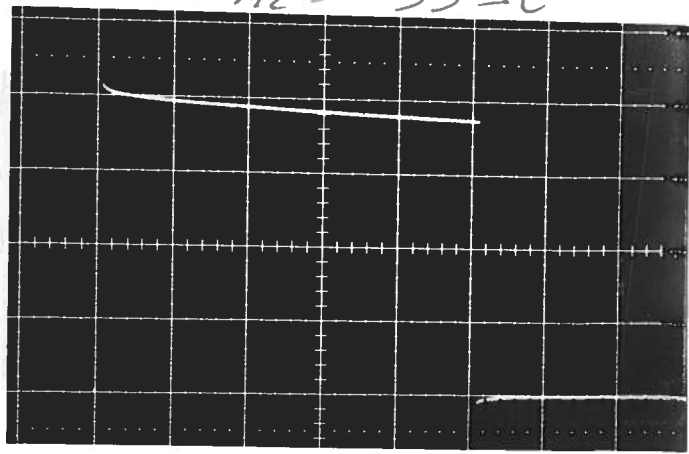

Ⓑ *50 VOLT/DIV*
20 nSEC/DIV
50 Hz
R_L = 33 Ω

120/240V
50-60 Hz