


PULSE GENERATOR  
PERFORMANCE CHECK

Model: *AVO-3A.PS-WH2-P*

S.N.: *2378*

Date: *AM 174 B 1485*

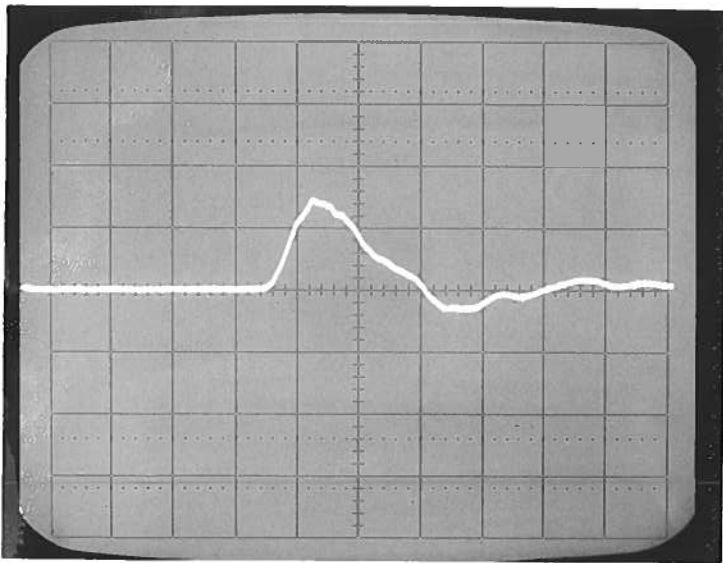

- a) Output signal amplitude: *25 TO +75 AMP*
- b) Pulse width: *2 ± 0.5 NSCZ.*
- c) Rise time: *NA*
- d) Fall time: *NA*
- e) PRF: *0 TO 60 KHZ.*
- f) Jitter, stability: *OK*
- g) Prime power:

*120/240 V*  
*50 - 60 Hz.*

*≈ 20 AMP/DIV*  
*2.0 NSCZ/DIV*  
*60 KHZ.*

*$R_s = 5.1 \Omega$*

*\* FOR LOWER CURRENT  
INCREASE  $R_s$  ABOVE  
5.1  $\Omega$  AMP/OR ADD  
SHUNT RESISTOR ACROSS  
DIODE.*