


PULSE GENERATOR
PERFORMANCE CHECK

Model: *AVL-2A-C-P-M-T-W*

S.N.: *2780*

Date: *DEC 12 85*

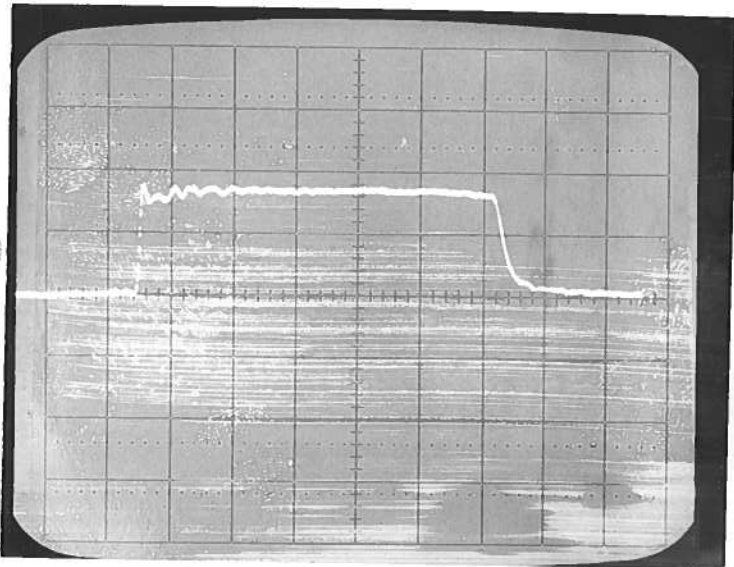

- b) Output signal amplitude:
0 TO +170 VOLTS
- c) Pulse width:
*0 TO 400 NSEC**
- d) Rise time:
≤ 1 NSEC
- e) Fall time:
≤ 2 NSEC
- f) PRF:
0 TO 5 KHz
- g) Jitter, stability:
6K
- h) Prime power:

*100 VOLTS/DIV
10 NSEC/DIV
5 KHz*

*120/240 V
50-60 Hz*

[Signature]

** FOR 100-400 NSEC
NEED EXTERNAL
CABLE. SEE
PARA 5.*