


PULSE GENERATOR

PERFORMANCE CHECK

Model: *PMMR-2-PS-TXF-PN-OT-M*


S.N.: *3906*

Date: *OCT 13 87*

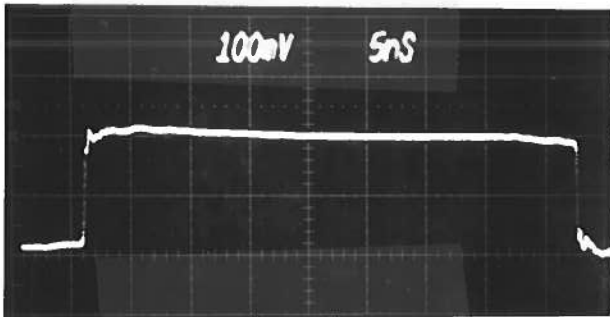


- a) Output signal amplitude:  
*0 TO ± 20 VOLTS*
- b) Pulse width:  
*20 TO 200 NSEC.*  
*(25% MAX DUTY CYCLE)*
- c) Rise time:  
*0.3 OR 3 NSEC*

Ⓐ *40 db ATTEN*  
*10 VOLTS/DIV*  
*500 KHz TR, TF*  
*Low*

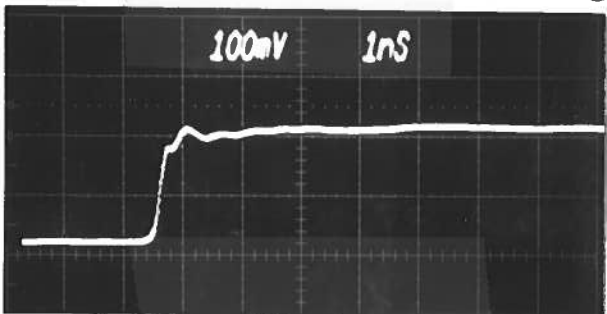

- d) Fall time:  
*0.3 OR 3 NSEC*
- e) PRF:  
*0 TO 5 MHz (Low TR, TF)*  
*0 TO 10 MHz (HIGH TR, TF)*
- f) Jitter, stability:

Ⓑ AS Ⓐ BUT 1NSEC/DIV  
*TR (low)*

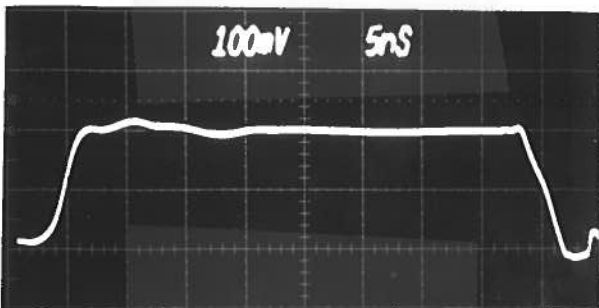

- g) Prime power:  
*OK*  
*120/240V*  
*50-60 Hz*

*[Signature]*

Ⓒ AS Ⓐ BUT TR, TF HIGH