


PULSE GENERATOR  
PERFORMANCE CHECK

Model: *PRR-HB-PW-C-PN*

S.N.: *4298*

Date: *APRIL 11 1988*

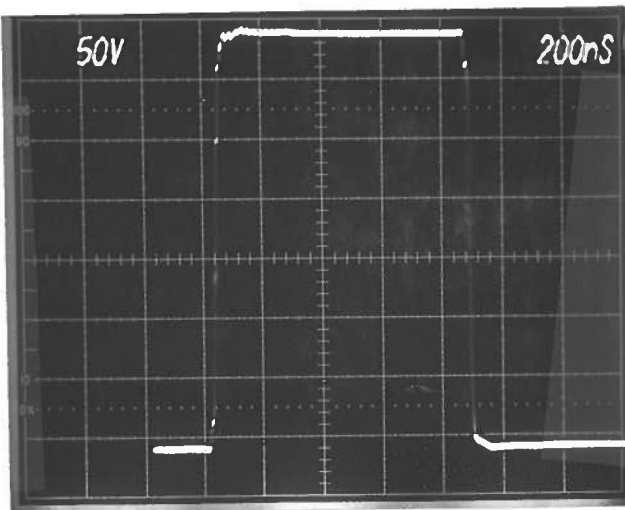

a) Output signal amplitude:  
*0 TO ± 400 VOLTS*

b) Pulse width:  
*0.1 TO 100 μSEC*

c) Rise time:  
*≤ 20 nSEC*

d) Fall time:  
*≤ 20 nSEC*

e) PRF:  
*MAX PW: 0 TO 50 kHz*  
*PW ≤ 1.0 μSEC: 0 TO 1 kHz*


f) Jitter, stability:

*OK*

g) Prime power:

*120/240 V*  
*30-60 kHz*

Ⓐ *Pant 1 kHz*  
*f<sub>c</sub> = 50 ~*

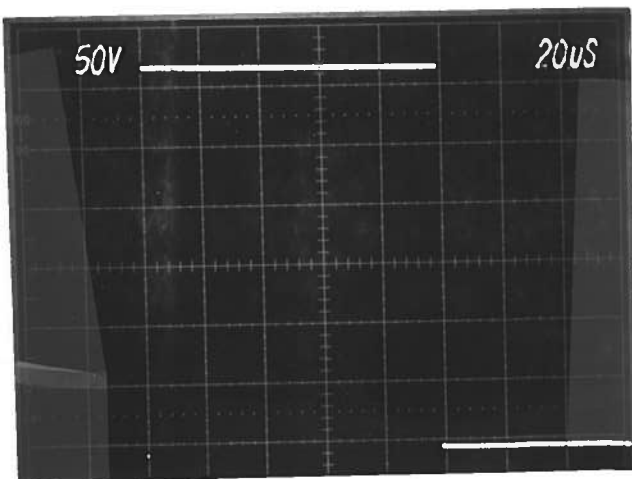


Ⓑ *AS Ⓐ BUT 50 kHz*

PULSE GENERATOR  
PERFORMANCE CHECK

Model:

S.N.: 4298 cont.

Date:

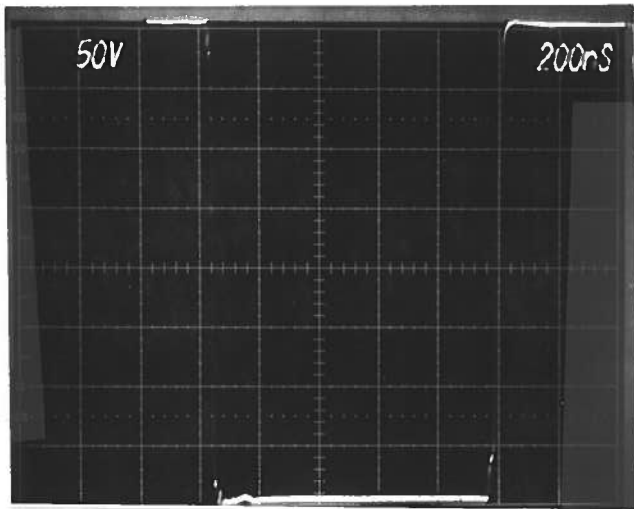

a) Output signal amplitude:

b) Pulse width:

c) Rise time:


d) Fall time:

e) PRF:

f) Jitter, stability:

g) Prime power:

Ⓒ  $N_{out}$  1 KHz  
 $R_L = 50 \Omega$

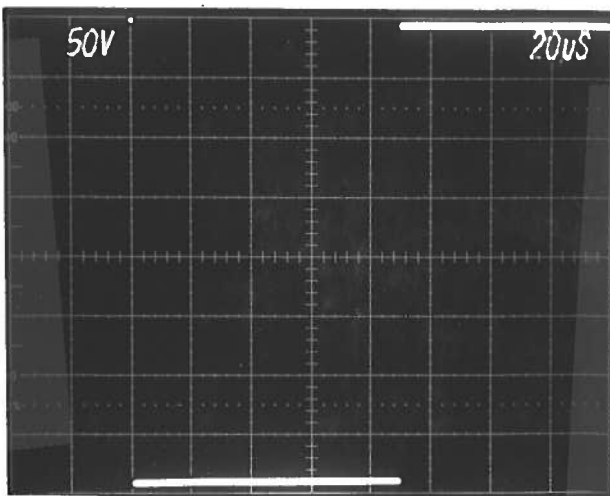

Ⓓ  $N_{out}$  50 Hz  
 $R_L = 50 \Omega$