


PULSE GENERATOR
PERFORMANCE CHECK

Model: AVO-5-C-PN-M-SNLI

S.N.: 4481

Date: AUG 31 88

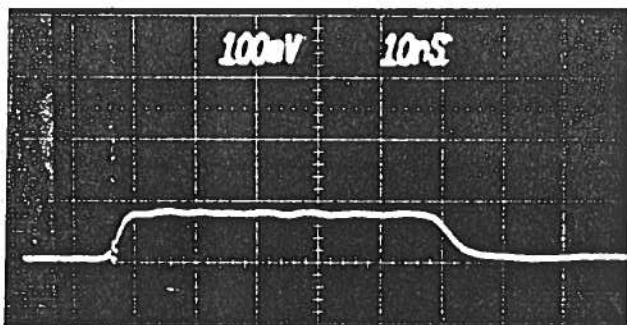

~ 32 AMP/Div
2.0 KHz

- a) Output signal amplitude:
0 TO ± 23 AMP
- b) Pulse width:
5 TO 100 NS
- c) Rise time:
 ≤ 3 NS
- d) Fall time:
 ≤ 4 NS
- e) PRF:
0 TO 5 KHz
- f) Jitter, stability:
- g) Prime power: OK

(PHOTO OBTAINED USING
AVO-5-T WITHOUT
SNLI OPTION. $R_L = 0.7 \Omega$)

120/240 V
50-60 HZ

h) SNLI OPTION
ACCEPTS 8-32
LASER DIODE
PACKAGE.