


PULSE GENERATOR
PERFORMANCE CHECK


Model: *AVO-5B-C-PN-M-SNL1*

S.N.: *4482*

Date: *AUG 31 1988*

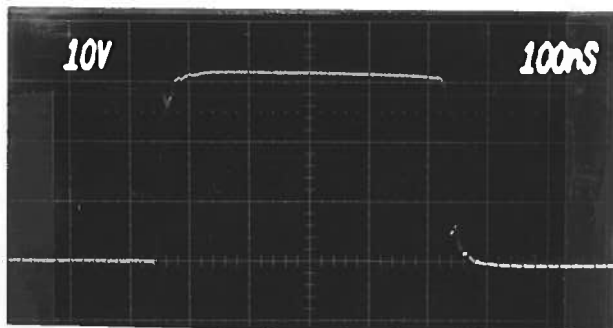

P_{OUT} $R_L = 0.7 \Omega$
(AVO-5B-T WITHOUT
SNL1 OPTION)

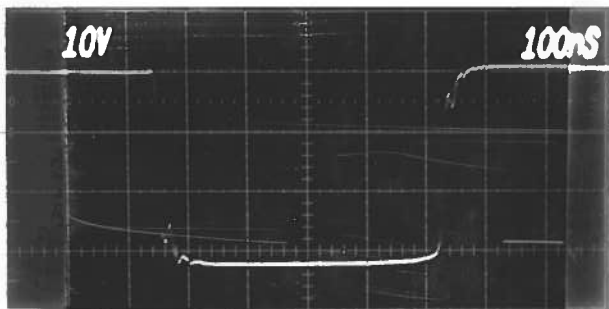

P_{OUT} $R_L = 0.7 \Omega$
(AVO-5B-T
WITHOUT SNL1
OPTION)

- a) Output signal amplitude:
0 TO ± 48 AMPS
- b) Pulse width:
25 TO 500 NS
- c) Rise time:
 ≤ 10 NS
- d) Fall time:
 ≤ 10 NS
- e) PRF:
0 TO 1.0 KHz
- f) Jitter, stability:
OK
- g) Prime power:
120/240 V
50-60 Hz

1) SNL1 OPTION:
*ACCEPTS 8-32
LASER DIODE
PACKAGE.*