


PULSE GENERATOR  
PERFORMANCE CHECK

Model: AMR-BI-TR-PN-05-C-M1


S.N.: 4508

Date: OCT 12 '88

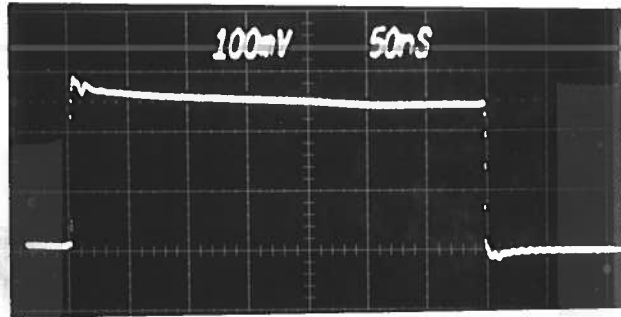


- a) Output signal amplitude:  
0 TO ±20 VOLTS
- b) Pulse width:  
20 TO 350 NS
- c) Rise time:  
≤ 250 PSEC
- d) Fall time:  
≤ 3 NS

Ⓐ P<sub>OUT</sub> 40db ATTEN  
10 VOLTS/DIV  
10 KHZ

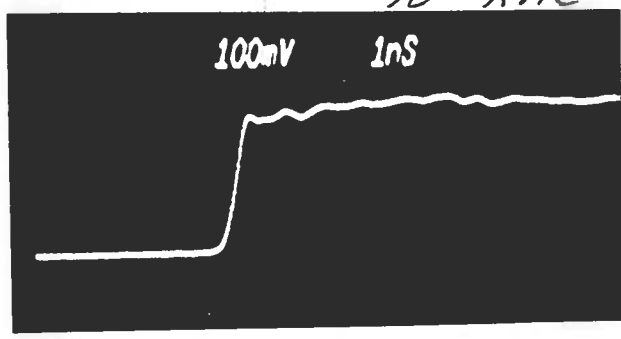

- e) PRF:  
0 TO 100 KHZ
- f) Jitter, stability:  
OK
- g) Prime power:  
120/240 V  
50-60 Hz

Ⓑ RISE TIME  
10 VOLTS/DIV

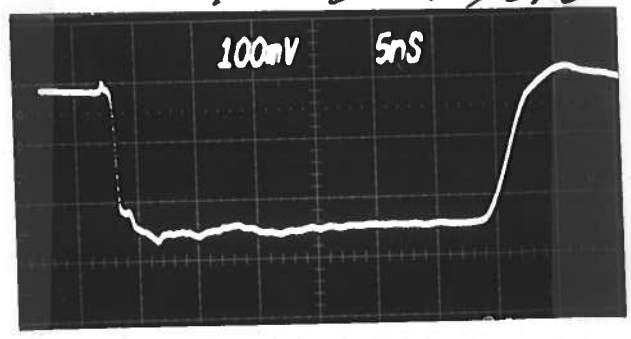


Ⓒ N<sub>OUT</sub> 40db ATTEN  
10 VOLTS/DIV  
100 KHZ

PULSE GENERATOR  
PERFORMANCE CHECK


Model: *AVR-BI-TR-PN-05-C-M1*

S.N.: *4503 (KAMMA)*

Date: *JAN 31 89*

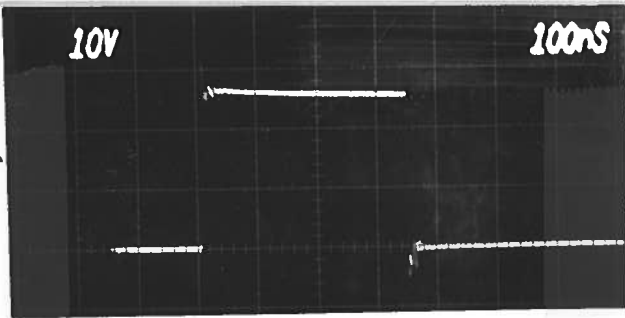

*P<sub>out</sub> DRIP < 1 VOLT*

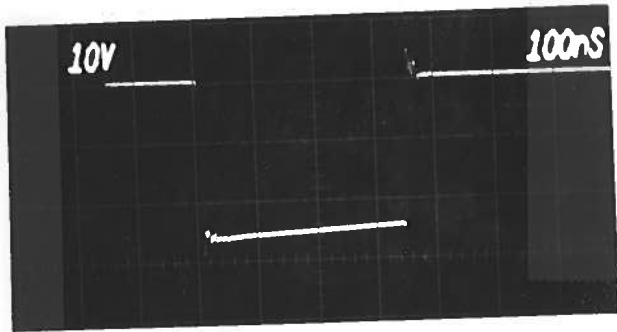

*N<sub>out</sub> DRIP < 2 VOLTS*

- a) Output signal amplitude:  
*0 TO ±20 VOLTS*
- b) Pulse width:  
*20 to 350 NSOR*
- c) Rise time:  
*≤ 250 PSEZ*
- d) Fall time:  
*≤ 3 NSOR*
- e) PRF:  
*0 TO 100 KHz*
- f) Jitter, stability:  
*OK*
- g) Prime power:  
*120/240 V*

*[Signature]*