


PULSE GENERATOR
PERFORMANCE CHECK

Model: *AVO-5A-C-N-EN-6A*

S.N.: *4576*

Date: *OCT 18 1988*

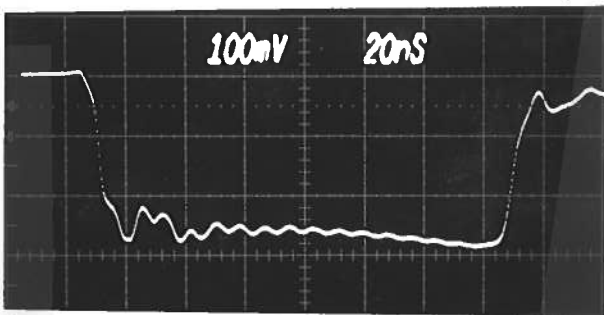

R_c = 0.7 Ω
40 dB ATTEN

≈ 10 VOLTS/DIV

≈ 14.3 AMP/DIV

5.0 KHz


- a) Output signal amplitude:
0 TO - 40 AMPS
- b) Pulse width:
20 TO 150 NSER
- c) Rise time:
≤ 5 NSER
- d) Fall time:
≤ 5 NSER
- e) PRF:
0 TO 5 KHz
- f) Jitter, stability:
OK

- g) Prime power:
120/240 V
50-60 Hz
- [Signature]*

- h) OFFSET:
0 TO ±1.0 AMP

PULSE GENERATOR
PERFORMANCE CHECK

Model: *AVO 5A-C-N-EA EW-MOD*
 S.N.: *4576*
 Date: *JAN 3 1989* *SUM 4 2011*

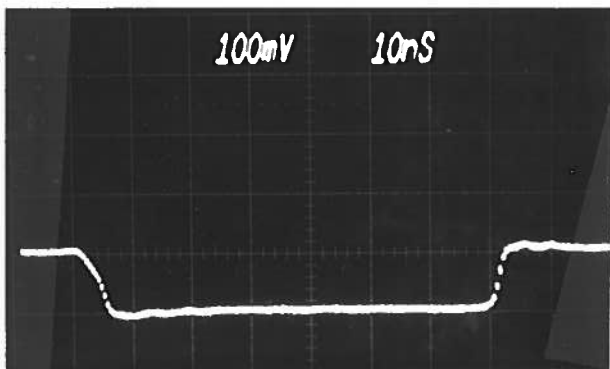

60 dB ATTEN

1.00 VOLTS/DIV
($R_L = 50 \Omega$)

- a) Output signal amplitude:
0 TO - 100 V
- b) Pulse width:
20 TO 150 NSEC
- c) Rise time:
6.5 NSEC
- d) Fall time:
6.5 NSEC
- e) PRF:
0 TO 5 KHz
- f) Jitter, stability:
OK
- g) Prime power:
120/240 V
50-60 Hz