


PULSE GENERATOR

PERFORMANCE CHECK


Model: AVR-B3-C-P-EA

S.N.: 4808

Date: Feb. 21, 1989

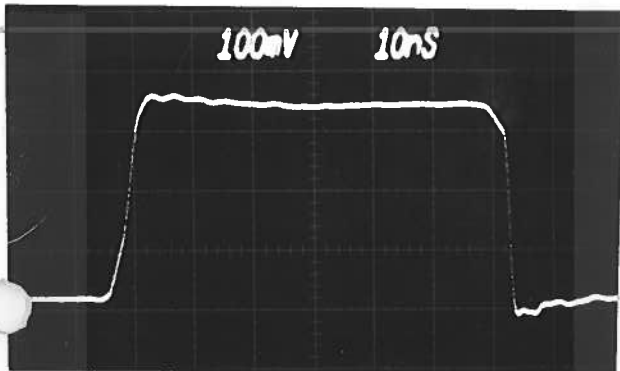

Ⓐ 50 db attenuation  
∴ ≈ 32 volts/div  
PRF = 20 KHz

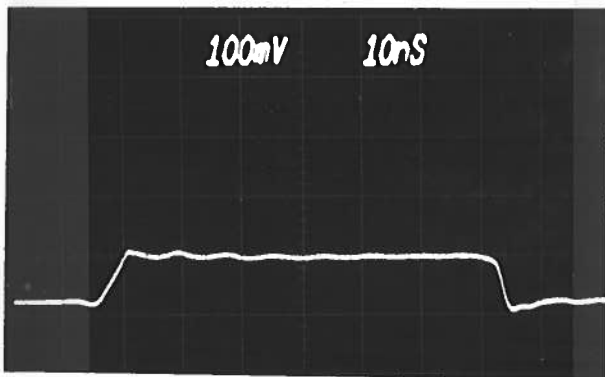

Ⓑ As A but  
 $V_{out} \approx 30$  volts

- a) Output signal amplitude:  
0 to +100 volts to 50 ohms
- b) Pulse width:  
20 to 200 nsec
- c) Rise time:  
≤ 5 nsec
- d) Fall time:  
≤ 5 nsec
- e) PRF:  
0 to 20 KHz
- f) Jitter, stability:  
OK
- g) Prime power:  
120/240 V  
50-60 HZ
- h) Prop. Delay:  
 $30 \pm 1.0$  nsec
- i) Gain:  
 $V_{out} = 100 \pm 1.0$  volt  
For  $V_{ER} = +9.7$  volts