


PULSE GENERATOR
PERFORMANCE CHECK

Model: *MR-4A-PW-PS-P*

S.N.: *5121*

Date: *Aug 7 26 1989*

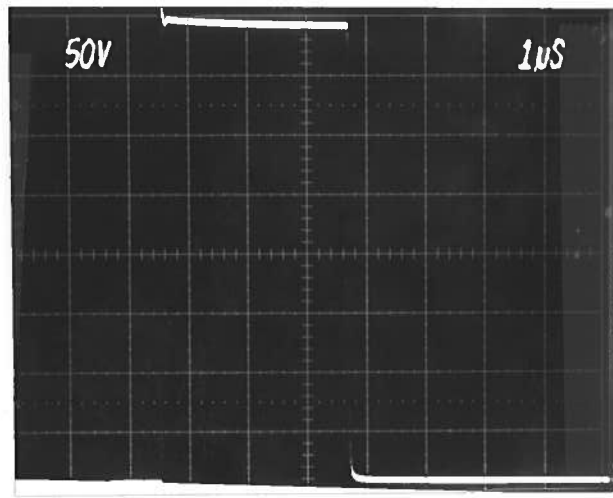

R_L = 50 Ω
PRF = 500 Hz

- a) Output signal amplitude:
0 to +400 Volts
- b) Pulse width:
0.1 to 5.0 μsec
- c) Rise time:
≤ 20 nsec
- d) Fall time:
≤ 20 nsec
- e) PRF:
0 to 1 kHz
- f) Jitter, stability:
OK
- g) Prime power:
170 / 240 V,
50-60 Hz.

[Signature]


PULSE GENERATOR

PERFORMANCE CHECK

Model: *APR-4A-DW-PS-P-CA-CW*

S.N.: *5121 (mod MAY 1990)*

Date: *MAY 20 1990*

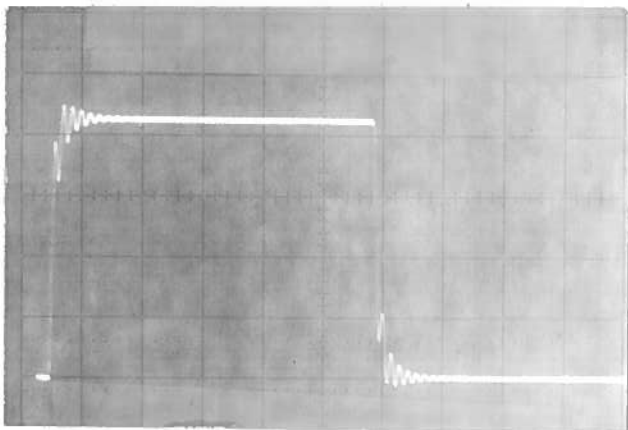

*200 V / DIV
1.0 μ SEC / DIV
PRF = 1.0 KHz*

- a) Output signal amplitude: *0 TO +400 V*
- b) Pulse width: *TO 50 μ s*
- c) Rise time: *0.1 TO 5.0 μ s*
 ≤ 20 nsec
- d) Fall time: *≤ 20 nsec*
- e) PRF: *0 TO 1.0 KHz*
- f) Jitter, stability: *O.K.*
- g) Prime power: *120 / 240 V*