


PULSE GENERATOR
PERFORMANCE CHECK

Model: *AVMIL-2 PS-OT-TRE-M-P*


S.N.: *5309*

Date: *MAR 13 1990*

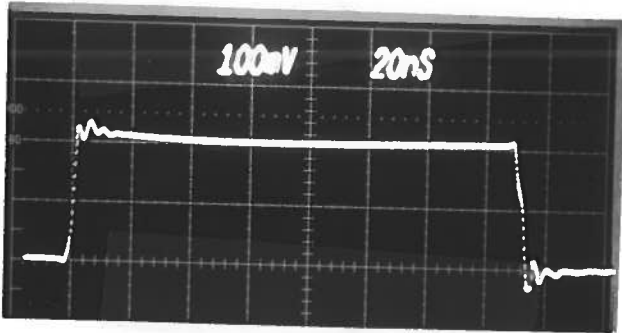


- a) Output signal amplitude:
0 TO +20 VOLTS
- b) Pulse width:
20 TO 200 NS
- c) Rise time:
LOW: ≤ 300 PSEC
17611: ≤ 3 NS
- d) Fall time:
LOW: ≤ 300 PSEC
17611: ≤ 3 NS
- e) PRF:
0 TO 5 MHz
- f) Jitter, stability: *Cycle*
- g) Prime power:
OK
120/240 V
50-60 Hz

② *TR, TF HIGH*
40 db ATTEN
10 VOLTS/DIV, PRF = 500 KHz

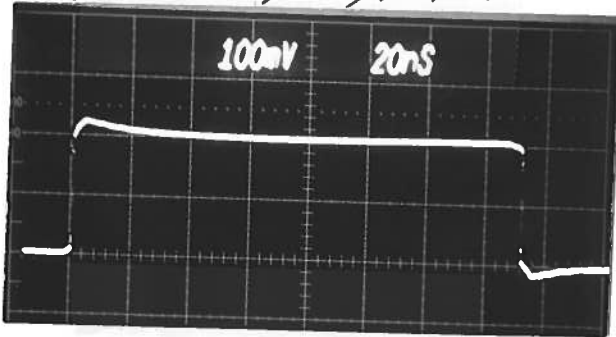

③ *AS ② BUT*
TR, TF LOW

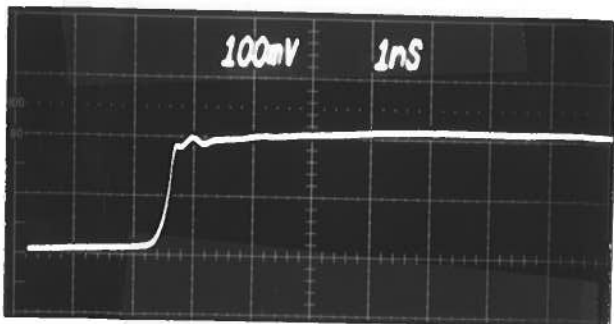

④ *RISE TIME TR LOW*