


PULSE GENERATOR
PERFORMANCE CHECK

Model: *APR-4B-PW-C-P*

S.N.: *5604*


Date: *SEPT 6 1980*

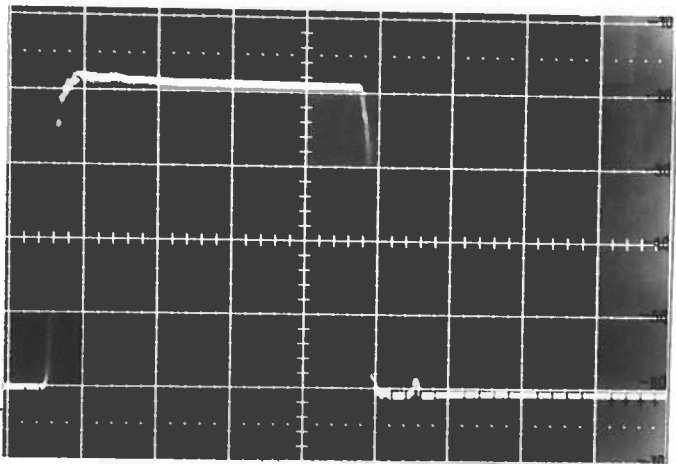

- a) Output signal amplitude: *0 TO +400 V TO*
- b) Pulse width: *50 ns*
- c) Rise time: *0.1 TO 100 ns*
- d) Fall time: *≤ 20 ns*

(A) *100 VOLTS/DIV*
200 NS/DIV
R_L = 50Ω (1 kHz)

- e) PRF: *PW ≤ 10 μSEC: 0 TO 1 kHz*
- f) Jitter, stability: *PW = 100 μSEC: 0 TO 50 kHz*

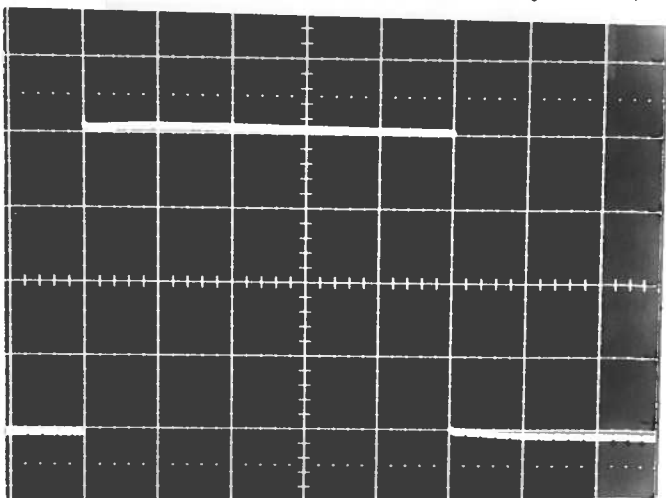

- g) Prime power: *OK*
120 / 200 V
50 - 60 kHz

[Signature]

(B) *100 VOLTS/DIV*
20 μS/DIV
R_L = 50Ω (50 kHz)