


PULSE GENERATOR
PERFORMANCE CHECK

Model: AV45-1-C-P

S.N.: 5040

Date: APRIL 5 1991

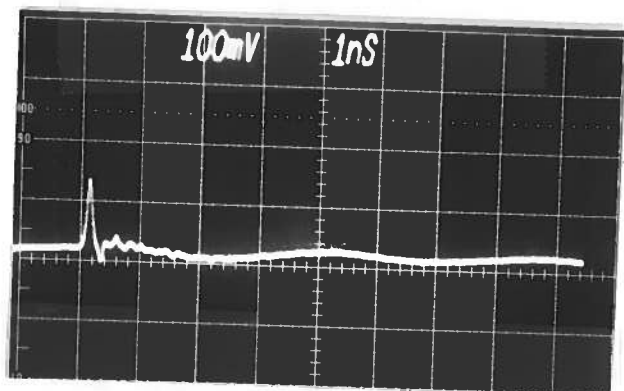

- a) Output signal amplitude: 0 TO +10 VOLTS
- b) Pulse width: ≤ 130 PS
- c) Rise time: NA
- d) Fall time: NA
- e) PRF: 0 TO 1.0 MHz
- f) Jitter, stability: OK
- g) Prime power: 120/240V
50-60 Hz

40 dB ATTEN

10 VOLTS/DIV

PRF = 700 kHz

120/240V
50-60 Hz


PULSE GENERATOR

PERFORMANCE CHECK


Model: ANH-S-1-C-1P

S.N.: 5840 (mod)

Date: June 25 1991

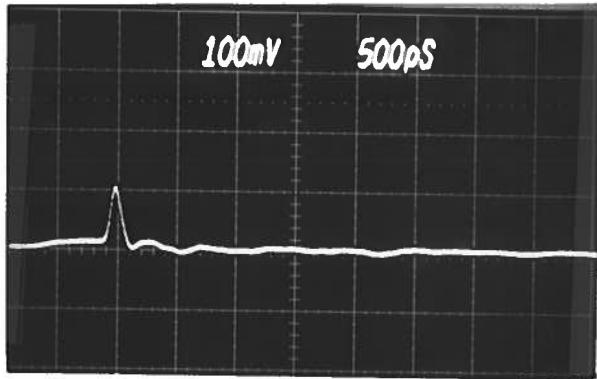

(A) 40 db ATTEN
10 uV/div/div
PRF = 10 MHz

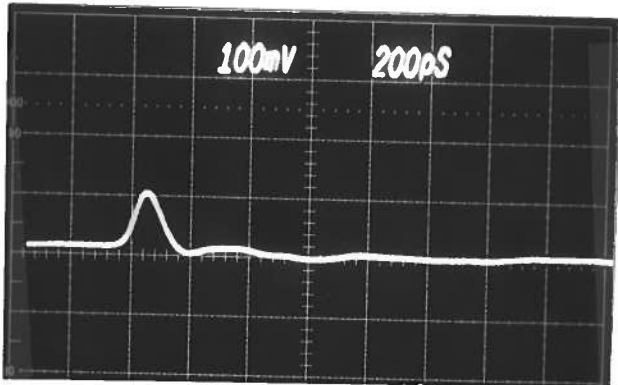

(B) 19.5 (A) BUT
200 ps/div

- a) Output signal amplitude:
0 to +10 uV/div
- b) Pulse width:
200 ps (to 1.0 ns)
- c) Rise time:
NA
- d) Fall time:
NA
- e) PRF:
0 to 1.0 MHz
- f) Jitter, stability:
OK
- g) Prime power:
120/240V
50-60 Hz

J