


PULSE GENERATOR

PERFORMANCE CHECK

Model: *AVO-7A-C-AN*


S.N.: *5913*

Date: *MAY 27 91*

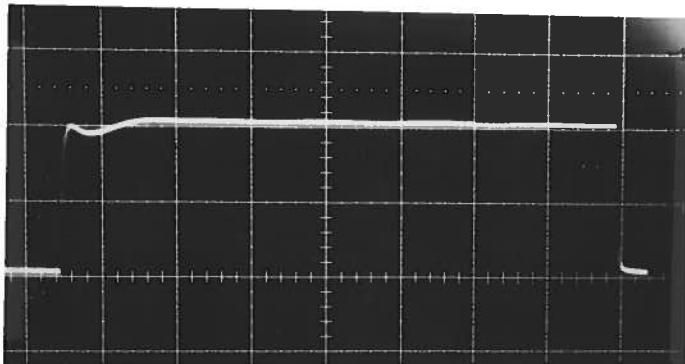


- a) Output signal amplitude:
0 TO ± 40 AMPS
- b) Pulse width: ($V_L \leq \pm 20$ VOLT)
0.2 TO 200 μ S
- c) Rise time:
≤ 100 NS

Font $R_L = 0.5 \Omega$ 10 VOLTS/DIV (20 AMPS/DIV)
2.0 μ S/DIV

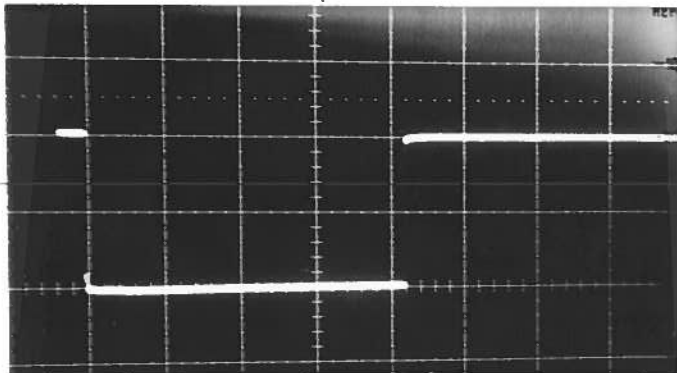

- d) Fall time:
≤ 100 NS
- e) PRF:
0 TO 1 KHz
- f) Jitter, stability: *OK*
1% Duty Cycle (max)

Font $R_L = 0.5 \Omega$, 20 AMPS/DIV
50 μ S/DIV (EXT = 6800 μ S/DIV)

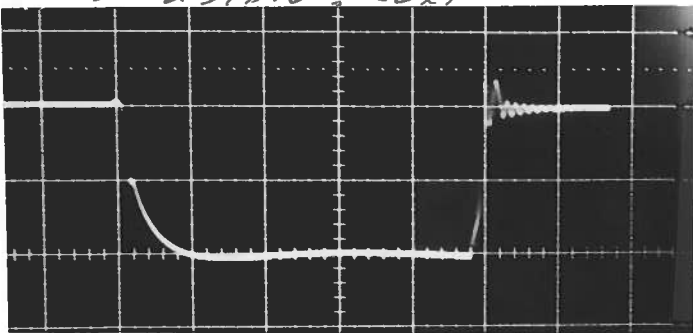

Font $R_L = 0.5 \Omega$, 20 AMP/DIV
200 NS/DIV

120/240 V
50-60 Hz