


PULSE GENERATOR

PERFORMANCE CHECK

Model: *APD-2A-C-P-LA1 4AV-53A-MI-LA1A*

S.N.: *6070 + 6074*

Date: *OCT 29 1991*

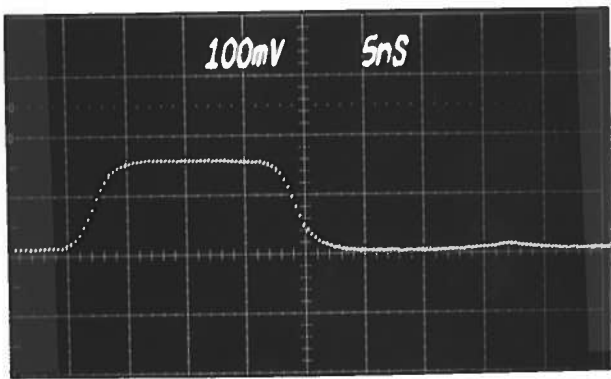

- a) Output signal amplitude:
0 TO +5 AMPS
- b) Pulse width:
5 TO 58 NS
- c) Rise time:
≤ 2 NS

- d) Fall time:
≤ 2 NS
- e) PRF: *10, 20 + 1000 HR.*

f) Jitter, stability:
OK

g) Prime power:
120/240 V
50-60 HR

MI OUT TO 30 dB

≈ 3.2 VOLTS/DIV

≈ 5.0 AMPS

*SILICON DIODE (IN 459A)
USED TO BIMULATE
DIODE LOAD.*

[Signature]