


PULSE GENERATOR

PERFORMANCE CHECK

Model: AVO-2A-C-P-LA1 & PAR-53A-MI-LA1A

S.N.: 6071 + 6075

Date: OCT 29 1991

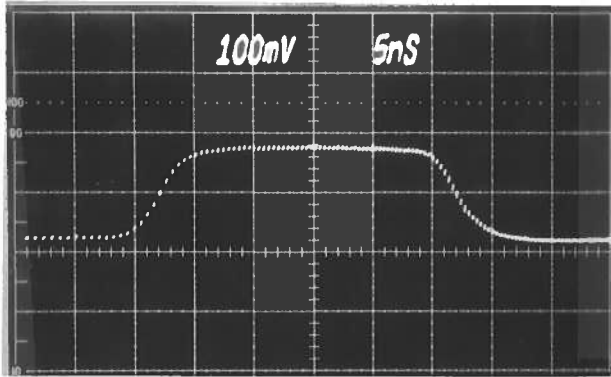

- a) Output signal amplitude:
0 TO +5.0 Amp)
- b) Pulse width:
3 TO 5 NS
- c) Rise time:
≤ 2 NS
- d) Fall time:
≤ 2 NS
- e) PRF:
10, 20 + 1000 Hz
- f) Jitter, stability:
OK
- g) Prime power:

ME output TO
30 db

∴ = 3.2 VOLTS/DIV

∴ = 5.0 AMPS

SILICON DIODE (1N459A)
USED TO SIMULATE
DIODE LOAD.

120/240 V,
50-60 Hz.