


PULSE GENERATOR

PERFORMANCE CHECK

Model: *MVL-AV-1-C-W-T-PN-05-M-6A*

S.N.: *6107*

Date: *DEC 18 1991*

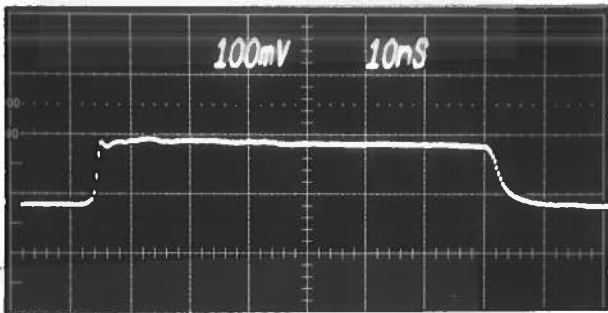

a) Output signal amplitude:
0 TO ± 100 VOLTS

b) Pulse width:
*5 TO 400 NS**

c) Rise time:
≤ 1 NS TO 10 NS


d) Fall time:
≤ 3 NS TO 10 NS

e) PRF:
0 TO 5 KHz.

f) Jitter, stability:
OK

g) Prime power:
120/240 V
50-60 Hz NY

Ⓐ *Point, TR AT MIN*
60 dB ATTEN
100 VOLTS/DIV

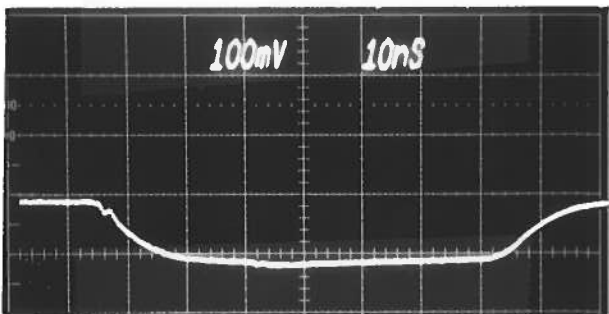

Ⓑ *Point, TR AT MAX*
60 dB ATTEN
100 VOLTS/DIV
PRF = 5 KHz.

* *For 100-400 NS*
RANGE REQUIRES
ADDITIONAL EXTENSION
CABLE.