


PULSE GENERATOR
PERFORMANCE CHECK

Model: *AV6-3A-60A*

S.N.: *6408*

Date: *Aug 7 1992*

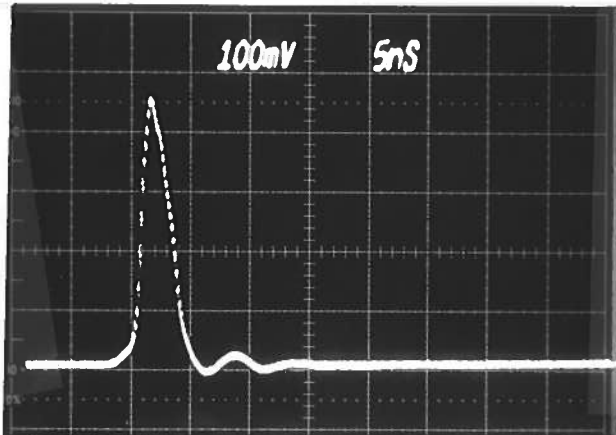

60 dB ATTEN
100 VOLTS/DIV
PRF = 10 KHz

- a) Output signal amplitude:
+150 TO +450 VOLTS
- b) Pulse width: *TO 50n*
± 4 NS
- c) Rise time:
± 10 NS
- d) Fall time:
± 2.5 NS
- e) PRF:
0 TO 20 KHz
- f) Jitter, stability:
OK
- g) Prime power:
+15 VOLTS
400 mA (max)


PULSE GENERATOR

PERFORMANCE CHECK

Model: *AVG-3A-COA*

S.N.: *6408 (M.D)*

Date: *JUN 22 1993*

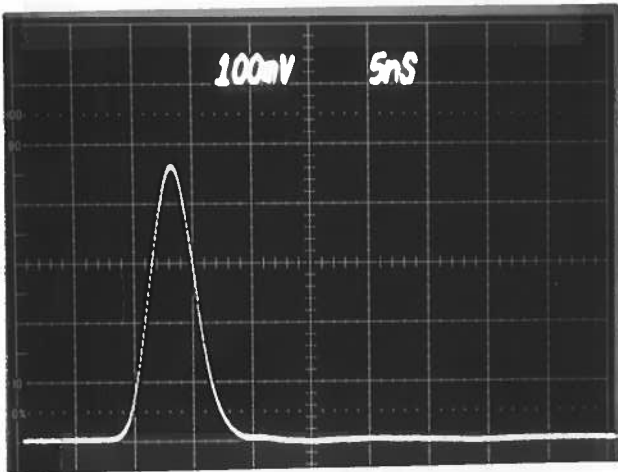

a) Output signal amplitude:
150 TO 450 VOLTS

b) Pulse width:
= 8 nS

c) Rise time:
≈ 3 nS

d) Fall time:
≈ 3 nS

e) PRF:
0 TO 20 KHz

f) Jitter, stability:
OK

g) Prime power:
+ 15 VOLTS
600 mA (MAX)
[Signature]

60 dB ATTEN
- 100 VOLTS DIV
PRF = 20 KHz