


PULSE GENERATOR

PERFORMANCE CHECK

Model: AVO-2A-C-P-LA1 (+ AVX-S3A-MI-LA1A)

S.N.: 6798 (46802)

Date: SEPT 22/93

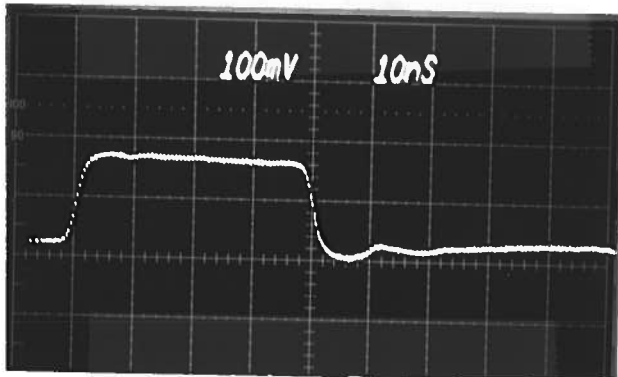

MI OUT TO 30 db

$\therefore \approx 3.2 \text{ VOLTS/DIV}$

$\therefore \approx 5.0 \text{ AMP}$

IN 459A DIODE USED
TO SIMULATE L.D.

a) Output signal amplitude:

0 TO + 5.0 AMP

b) Pulse width:

5 TO 50 NS

c) Rise time:

$\leq 2 \text{ NS}$

d) Fall time:

$\leq 2 \text{ NS}$

e) PRF:

10, 20, 1000 Hz

f) Jitter, stability:

OK

g) Prime power:

120/240 V

50-60 Hz