


PULSE GENERATOR

PERFORMANCE CHECK


Model: *APR E3-PS-PEL2A1*

S.N.: *6838*


Date: *NOV 23 '93*

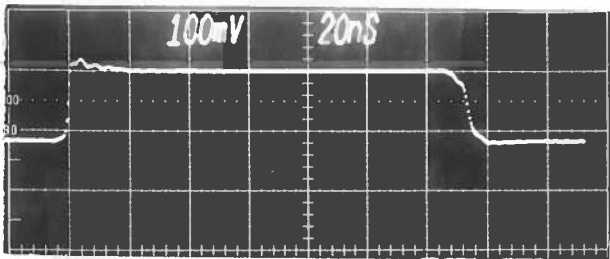

*TRFA: 100 V/DIV
5.0 KHz*

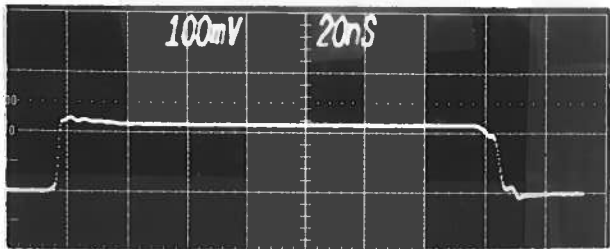


*TRFB: 100V/DIV
5.0 KHz*

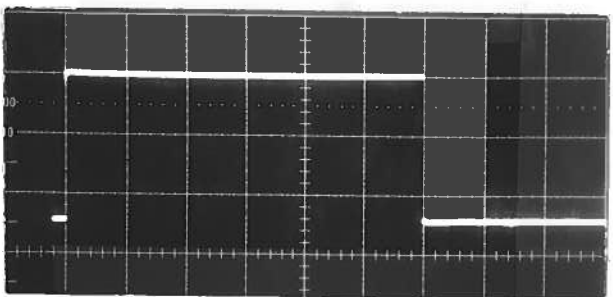

*SAC1A 1 KHz
50 V/DIV
2 us/DIV*

- a) Output signal amplitude:
120 VOLTS
- b) Pulse width:
TRF: 120 & 150 NS
- c) Rise time:
*SRL: 12 & 15 us
TRF: 1 NS*
- d) Fall time:
*SRL: 10 NS
TRF: 2 NS
SRL: 10 NS*
- e) PRF:
*TRF: 0 TO 10 KHz
SRL: 0 TO 1 KHz*
- f) Jitter, stability:
OK
- g) Prime power:
120/240V, 50-60 Hz.

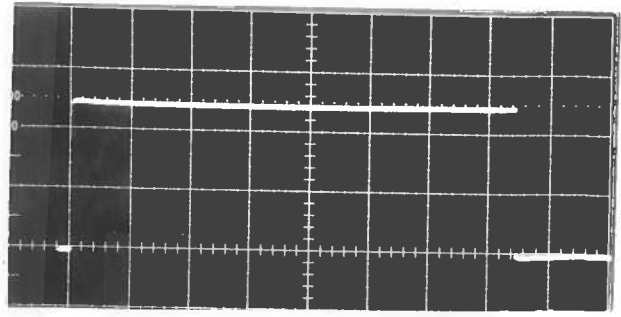

*SAC1B 1 KHz
50 V/DIV
2 us/DIV*