


PULSE GENERATOR
PERFORMANCE CHECK


Model: *ARR-3-C-M5*

S.N.: *6919*

Date: *APRIL 15 1994*

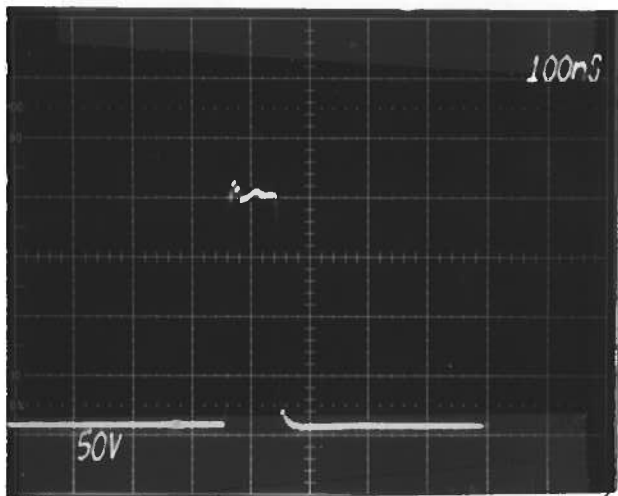

A out 50V/DIV, 100NS/DIV

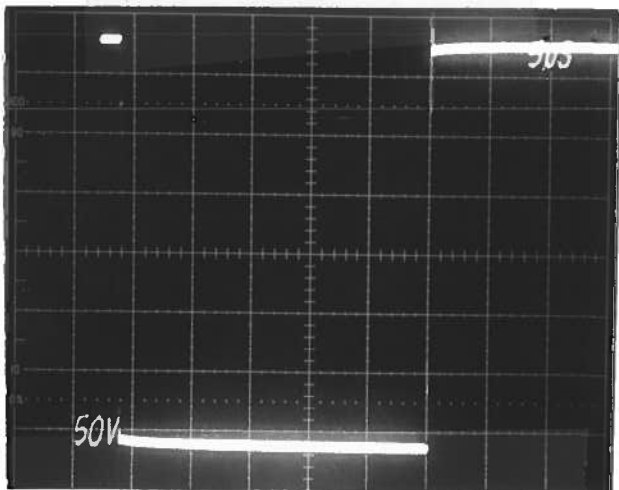

B out 50 VOLT DIV, 5 US/DIV

- a) Output signal amplitude:
 - A) 0 to +200 VOLTS TO 50 Ω*
 - B) -100 TO -500 VOLTS TO $R_L \ge 10 \Omega$*
- b) Pulse width:
 - A) 10 TO 100 NS*
 - B) 2 TO 35 US*
- c) Rise time:
 - A) < 10 NS*
 - B) < 20 NS*
- d) Fall time:
 - A) $\le 10 NS$*
 - B) $\le 20 NS$*
- e) PRF: *0 TO 2000 Hz*
- f) Jitter, stability: *OK*
- g) Prime power:
 - 120 / 240 V*
 - 50 - 60 Hz*
- A) OS 0 TO $\pm 100 VOLTS$*