


PULSE GENERATOR
PERFORMANCE CHECK

Model: AVP-2S-P-0S-ECL

S.N.: 7481

Date: DEC 19/95

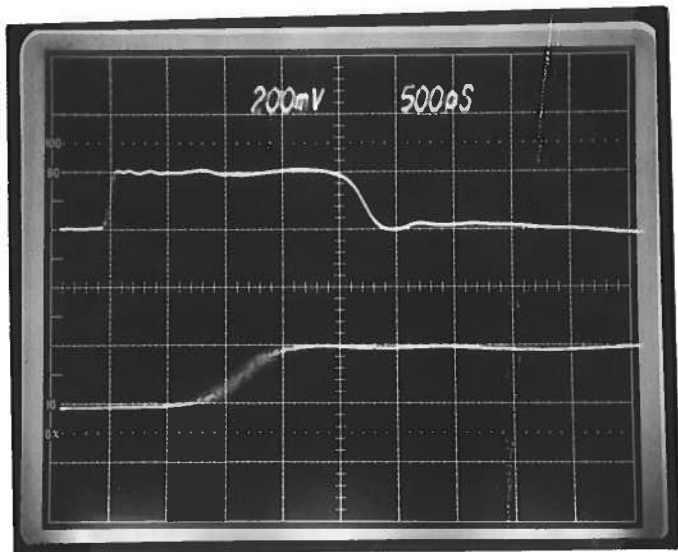

- a) Output signal amplitude:
0 TO +2 VOLTS
- b) Pulse width:
0.2 TO 4.0 NS
- c) Rise time:
500 pS/DIV
≤ 40 PS
- d) Fall time:
50 pS/DIV
≤ 135 PS
- e) PRF:
0 TO 1.0 MHz
- f) Jitter, stability:
OK
- g) Prime power:
+15 VOLTS
400 mA (MAX)

20 dB ATTEN
∴ 2 VOLTS/DIV
PRF = 1.0 MHz

$$T_{RT} = \sqrt{T_{R2S}^2 + T_{SCOPE}^2 + T_{ATTEN}^2}$$

≈ 50 PS (20-80%)

$T_{SCOPE} = 25 \text{ PS}$

18 GHz ATTEN + CABLES

∴ CONC THAT $T_{R2S} \leq 40 \text{ PS}$