


PULSE GENERATOR  
PERFORMANCE CHECK

Model: *ANRF-2-e-p*

S.N.: *7493*

Date: *FEB 5 1996*

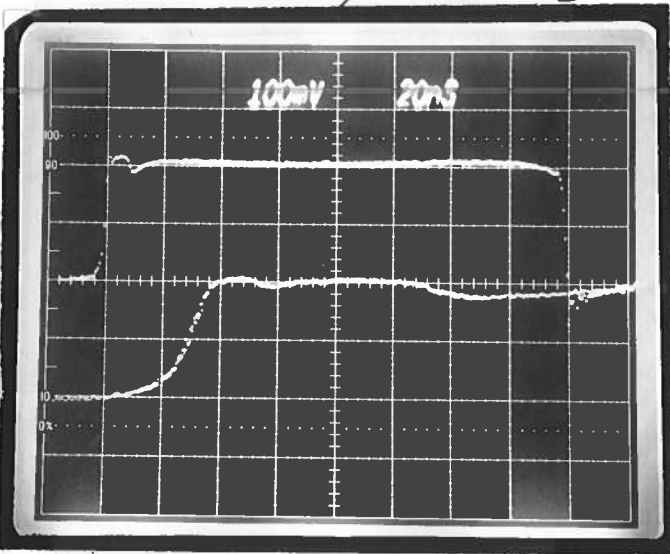

a) Output signal amplitude:  
*0 TO +200 VOLTS (TO 50Ω)*

b) Pulse width:  
*0.1 TO 100 μS*

c) Rise time:  
*0.5% MAX DUTY CYCLE*  
*≤ 2 NS*

d) Fall time:  
*≤ 2 NS*


e) PRF: *0 TO 1 KHz*

f) Jitter, stability:  
*0.5% MAX DUTY CYCLE*  
*OK*

g) Prime power: *120/240 V*  
*50-60 Hz*

*[Signature]*

①  
*TOP 20 NS/DIV, 100 V/DIV (60 db ATTEN)*  
*BOI 2 NS/DIV, 100V/DIV (60 db ATTEN)*  
*PRF ≈ 1 KHz, R<sub>L</sub> = 50 Ω*

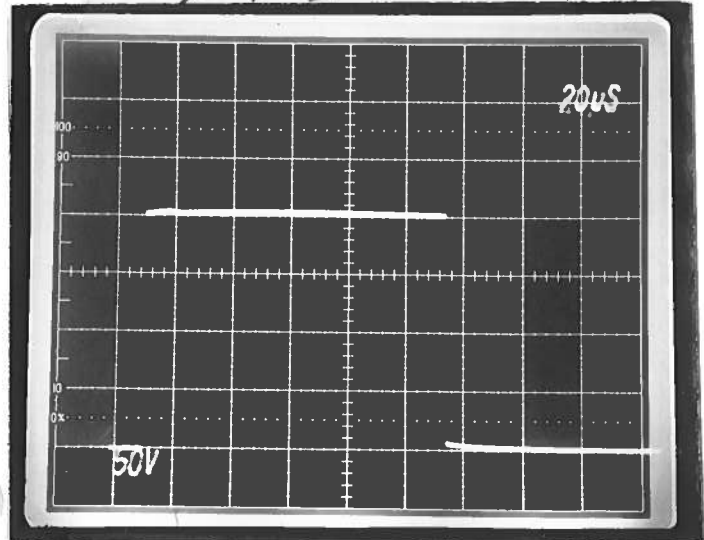

②  
*R<sub>L</sub> = 50 Ω, PRF = 50 Hz.*