


PULSE GENERATOR
PERFORMANCE CHECK

Model: *PA-1010-C*


S.N.: *7497*

Date: *OCT 30 1995*

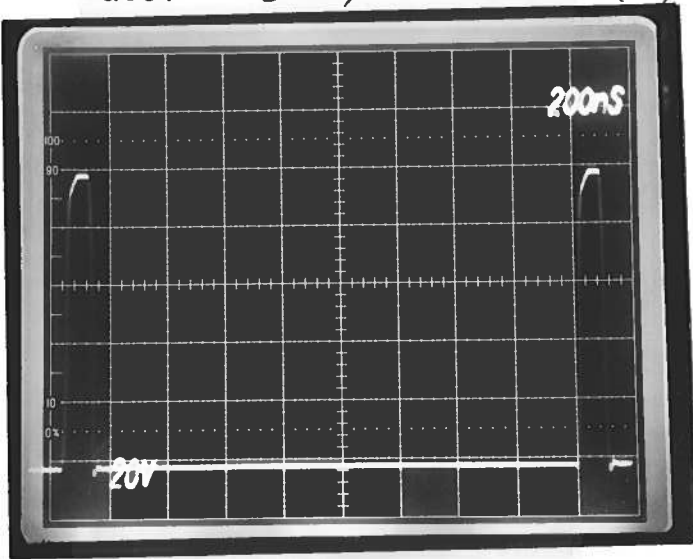


- a) Output signal amplitude:
0 TO ± 100 VOLTS
- b) Pulse width: ($R_L \geq 50 \Omega$)
50 NS TO 10 MS
(10% MAX DUTY CYCLE)
- c) Rise time:
≤ 15 NS
- d) Fall time:
≤ 15 NS
- e) PRF: *0 TO 1.0 MHz*
(10% MAX DUTY CYCLE)
- f) Jitter, stability:

Ⓐ Part, $R_L = 50 \Omega$

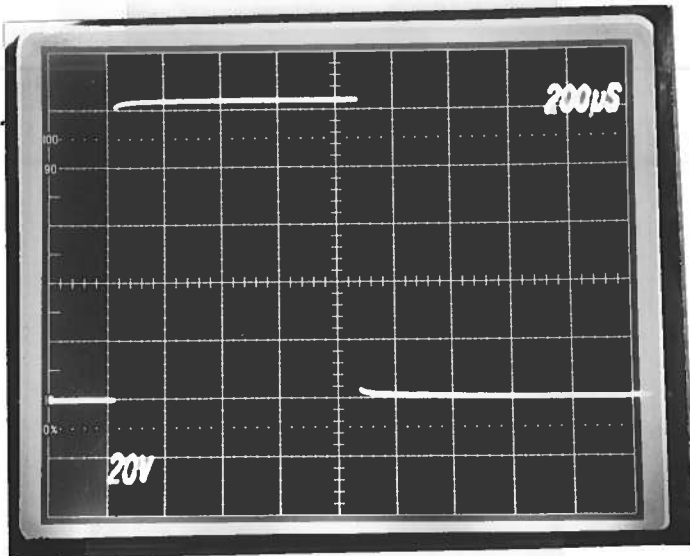

- g) Prime power:
DIL
120/240 VOLTS
50 - 60 MHz

Ⓑ Part $R_L = 50 \Omega$

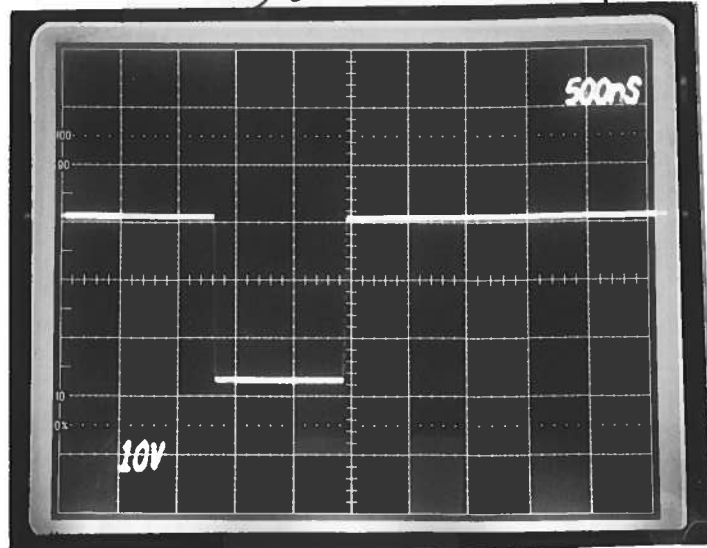

30V → Noise
RANGE: $R_L = 50 \Omega$