


PULSE GENERATOR
PERFORMANCE CHECK

Model: *AVD-6A1-C-P*


S.N.: *7522*

Date: *JAN 23 1996*

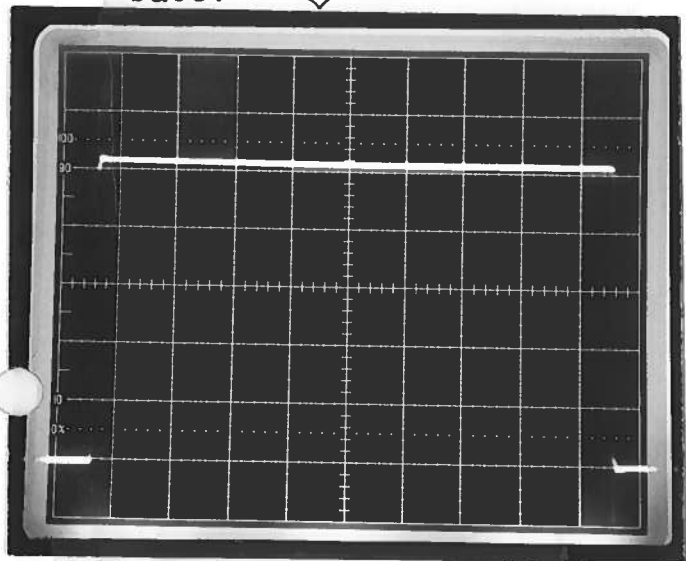


- a) Output signal amplitude:
0 TO +1.0 AMP
- b) Pulse width:
50 NS TO 5.0 US
- c) Rise time:
≤ 1 NS
- d) Fall time:
≤ 1 NS
- e) PRF:
0 TO 10 KHz
- f) Jitter, stability:
OK
- g) Prime power:
50-60 Hz
120/240 V

Ⓐ MAINFRAME OUT TO 50 Ω
10 V/DIV, 0.5 US/DIV

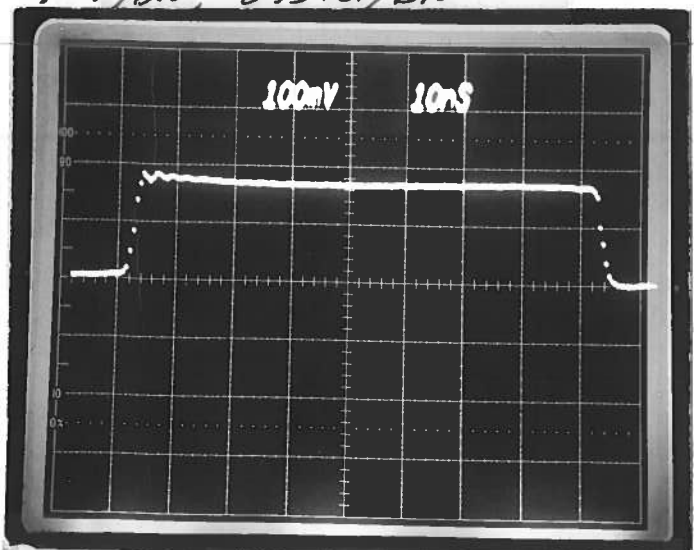

Ⓑ MAINFRAME OUT TO 50 Ω (50 Ω)
32 VOLTS/DIV, 10 NS/DIV
PRF = 10 KHz

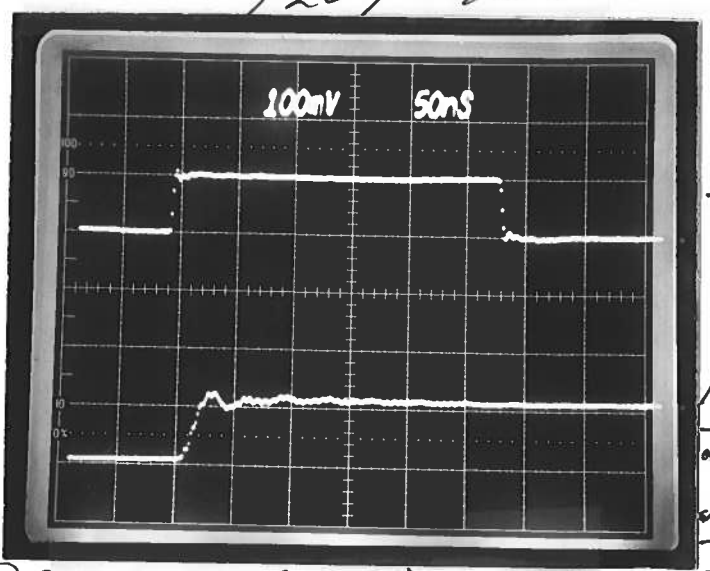

Ⓒ DIODE LOAD (1N459A) ON OUTPUT OF
AVD-6A1-T. CURRENT PROBE (7115) TO 50 Ω
1.0 AMP/DIV.

