


PULSE GENERATOR
PERFORMANCE CHECK


Model: *AVO-6D-C-N*

S.N.: *7604*

Date: *MAR 13 1996*

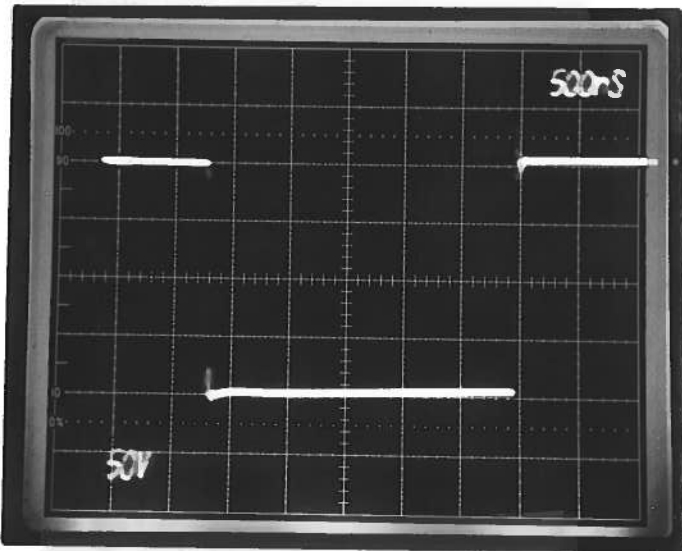

A MAIN FRAME OUT TO 50Ω.

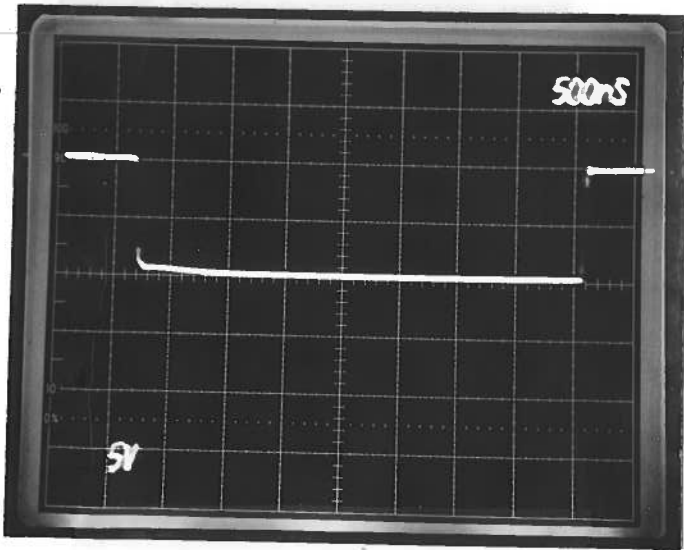

- a) Output signal amplitude:
0 TO -10 AMP
- b) Pulse width:
50 NS TO 5.0 US
(10% MAX DUTY CYCLE)
- c) Rise time:
≤ 10 NS
- d) Fall time:
≤ 10 NS
- e) PRF: *0 TO 10 KHz*
(10% MAX DUTY CYCLE)
- f) Jitter, stability:
OK
- g) Prime power: *50-60W*
120/240 V

AVO-6D-T OUT TO DIODE LOAD IN SERIES WITH 1Ω

