


PULSE GENERATOR  
PERFORMANCE CHECK

Model: MM4-4-CP-ED-M4A

S.N.: 7589

Date: OCT 30 1996

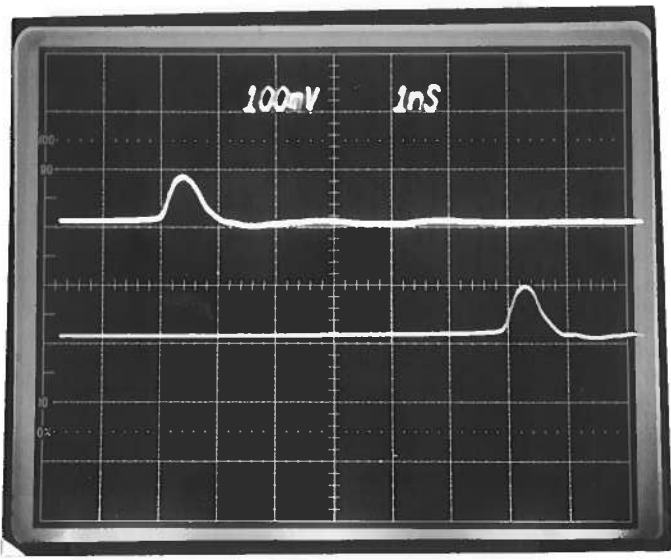

- a) Output signal amplitude: 0 TO +100 V
- b) Pulse width:  $U_L = 50 \Omega$   
 $\leq 1 \text{ NS}$
- c) Rise time: NA
- d) Fall time: NA
- e) PRF: 0 TO 10 MHz
- f) Jitter, stability: OK
- g) Prime power: 120 / 240 V  
50-60 Hz

60 db ATTN  
- = 100 VOLTS/DIV  
PRF = 1.0 MHz  
TOP: DELAY MIN  
BOT: DELAY MAX  
INPUT TRIG, +3.0 VOLTS,  
3 NS,  
1 MHz.

- h) DELAY 0 TO 5 NS.
- i) AMPLA +10 TO +30 V  
3 NS OK.

✓