


PULSE GENERATOR
PERFORMANCE CHECK


Model: *ANIR-1-C-SNLI-PWT-AT-AN2.*

S.N.: *3061*

Date: *MAY 15 1997*

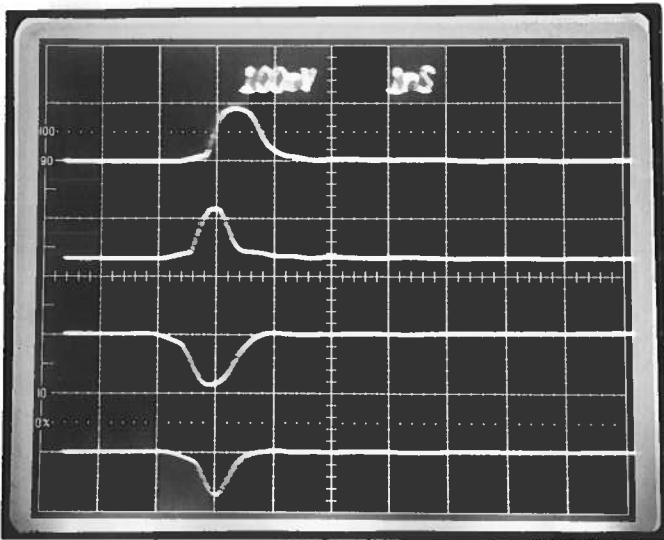

A)
100 VOLTS/DIV, 1 NS/DIV
1,2 POS OUT, 1.0 + 0.6 NS
3,4 NEG OUT, 1.0 + 0.6 NS

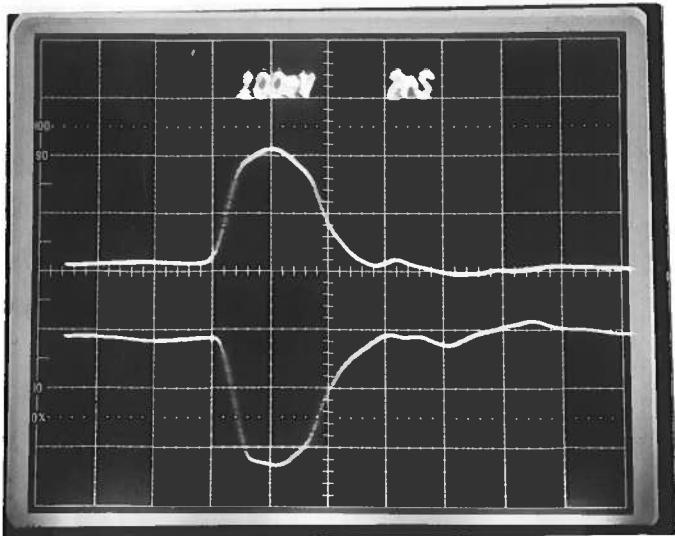

B) *100 V/DIV, 2 NS/DIV*

- a) Output signal amplitude:
A) 0 TO 5100 VOLTS
B) 0 TO 5200 VOLTS
- b) Pulse width:
A) 0.16 TO 1.0 NS
B) 1.0 TO 5.0 NS
- c) Rise time:
A) ≤ 0.5 NS
B) ≤ 1.0 NS
- d) Fall time:
A) ≤ 0.5 NS
B) ≤ 2.0 NS
- e) PRF: *0 TO 50 KHz*

f) Jitter, stability: *OK*

g) Prime power: *120/200 V*
50 80 KHz.

[Signature]

1 POS OUT
2 NEG OUT.

PRF = 25 KHz