


PULSE GENERATOR  
PERFORMANCE CHECK

Model: ANI-MP-P  
S.N.: 9006  
Date: SEPT 13 1999

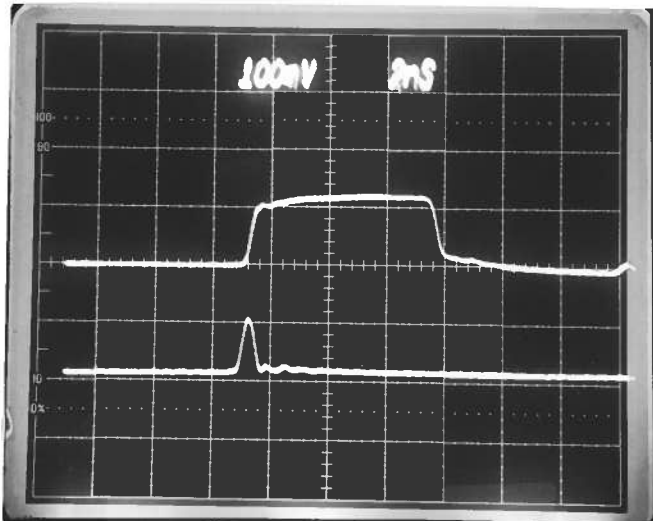

- a) Output signal amplitude:  $+40 \text{ V (TO } 50 \text{ V)}$
- b) Pulse width:  $2 \text{ TO } 100 \text{ ns}$
- c) Rise time:  $\leq 350 \text{ ps}$
- d) Fall time:  $\leq 2 \text{ ns}$
- e) PRF:  $0 \text{ TO } 1 \text{ MHz}$
- f) Jitter, stability:  $\text{OK}$
- g) Prime power:  $+15 \text{ VDC}$   
 $200 \text{ mA MAX}$

50 66 MTTN

3 32 VOLTS / DIV

PRF  $\approx 300 \text{ kHz}$

TOP DL = 24"

BOT DL  $\approx 0$ "

AA