PULSE GENERATOR

PERFORMANCE CHECK

Model: AV-151B-C

S.N.: 9050

Date: SEPT 8 99

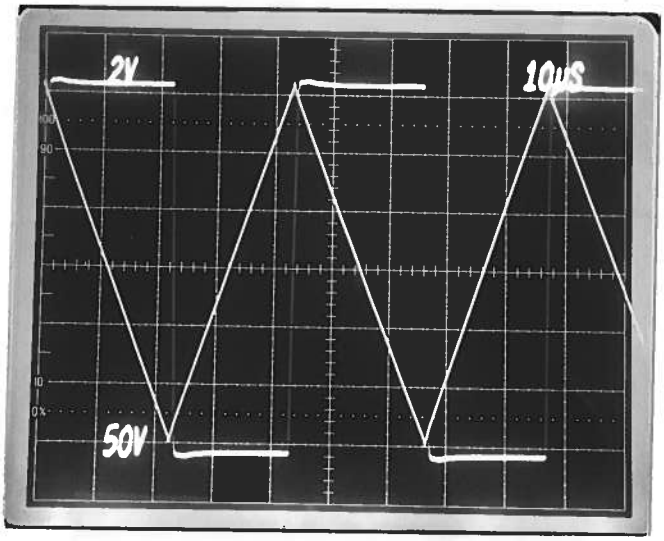

10 US/DIV
50 V/DIV
R_L = 50K

a) Output signal amplitude:
0 TO ± 200 V (R_L ≥ 50K)

b) Pulse width:
SINE, SQUARE, TRIANGLE
+DC OFFSET

c) Rise time:
≤ 1 US

d) Fall time:
≤ 1 US

e) PRF:
0 TO 100 KHz

f) Jitter, stability:
OK

g) Prime power: 100 ± 10 VOLTS
50-60 Hz

h) GAIN: 0 TO × 100